

Description

The series of devices uses **Super Trench II** technology that is uniquely optimized to provide the most efficient high frequency switching performance. Both conduction and switching power losses are minimized due to an extremely low combination of $R_{DS(on)}$ and Q_g . This device is ideal for high-frequency switching and synchronous rectification.

Application

- DC/DC Converter
- Ideal for high-frequency switching and synchronous rectification

General Features


- $V_{DS} = 120V, I_D = 215A$
- $R_{DS(on)} = 2.4m\Omega$, typical (TO-220)@ $V_{GS} = 10V$
- $R_{DS(on)} = 2.2m\Omega$, typical (TO-263)@ $V_{GS} = 10V$
- Excellent gate charge $\times R_{DS(on)}$ product(FOM)
- Very low on-resistance $R_{DS(on)}$
- 175 °C operating temperature
- Pb-free lead plating



TO-220C



TO-263

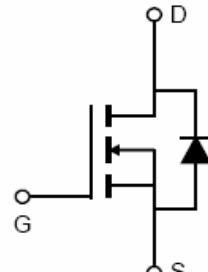

Schematic Diagram

Package Marking and Ordering Information

Device Marking	Device	Device Package	Reel Size	Tape width	Quantity
VST12N024-TC	VST12N024	TO-220C	-	-	-
VST12N024-T3	VST12N024	TO-263			

Absolute Maximum Ratings ($T_c=25^\circ C$ unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	V_{DS}	120	V
Gate-Source Voltage	V_{GS}	± 20	V
Drain Current-Continuous	I_D	215	A
Drain Current-Continuous($T_c=100^\circ C$)	$I_D (100^\circ C)$	150	A
Pulsed Drain Current	I_{DM}	860	A
Maximum Power Dissipation	P_D	340	W
Derating factor		2.27	W/ $^\circ C$
Single pulse avalanche energy (Note 4)	E_{AS}	2332	mJ
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 To 175	$^\circ C$

Thermal Characteristic

Thermal Resistance,Junction-to-Case	R _{θJC}	0.44	°C/W
-------------------------------------	------------------	------	------

Electrical Characteristics (T_C=25°C unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Off Characteristics						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V I _D =250μA	120		-	V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =120V, V _{GS} =0V	-	-	1	μA
Gate-Body Leakage Current	I _{GSS}	V _{GS} =±20V, V _{DS} =0V	-	-	±100	nA
On Characteristics (Note 2)						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250μA	2.0	3.0	4.0	V
Drain-Source On-State Resistance	R _{DS(ON)}	V _{GS} =10V, I _D =107.5A	TO-220	-	2.4	3.0
			TO-263		2.2	3.0
Forward Transconductance	g _{fs}	V _{DS} =5V, I _D =107.5A		200	-	S
Dynamic Characteristics (Note3)						
Input Capacitance	C _{iss}	V _{DS} =60V, V _{GS} =0V, F=1.0MHz	-	15500	-	PF
Output Capacitance	C _{oss}		-	1020	-	PF
Reverse Transfer Capacitance	C _{rss}		-	23	-	PF
Switching Characteristics (Note 3)						
Turn-on Delay Time	t _{d(on)}	V _{DD} =60V, I _D =107.5A V _{GS} =10V, R _G =1.6Ω	-	37	-	nS
Turn-on Rise Time	t _r		-	29	-	nS
Turn-Off Delay Time	t _{d(off)}		-	82	-	nS
Turn-Off Fall Time	t _f		-	34	-	nS
Total Gate Charge	Q _g	V _{DS} =60V, I _D =107.5A, V _{GS} =10V	-	225	-	nC
Gate-Source Charge	Q _{gs}		-	73	-	nC
Gate-Drain Charge	Q _{gd}		-	50	-	nC
Drain-Source Diode Characteristics						
Diode Forward Voltage (Note 3)	V _{SD}	V _{GS} =0V, I _S =107.5A	-		1.2	V
Diode Forward Current (Note 2)	I _S		-	-	215	A
Reverse Recovery Time	t _{rr}	T _J = 25°C, I _F = 107.5A di/dt = 100A/μs ^(Note2)	-	105	-	nS
Reverse Recovery Charge	Q _{rr}		-	290	-	nC

Notes:

1. Repetitive Rating: Pulse width limited by maximum junction temperature.
2. Pulse Test: Pulse Width ≤ 300μs, Duty Cycle ≤ 2%.
3. Guaranteed by design, not subject to production
4. EAS condition : T_j=25°C, V_{DD}=50V, V_G=10V, L=0.5mH, R_g=25Ω

Typical Electrical and Thermal Characteristics

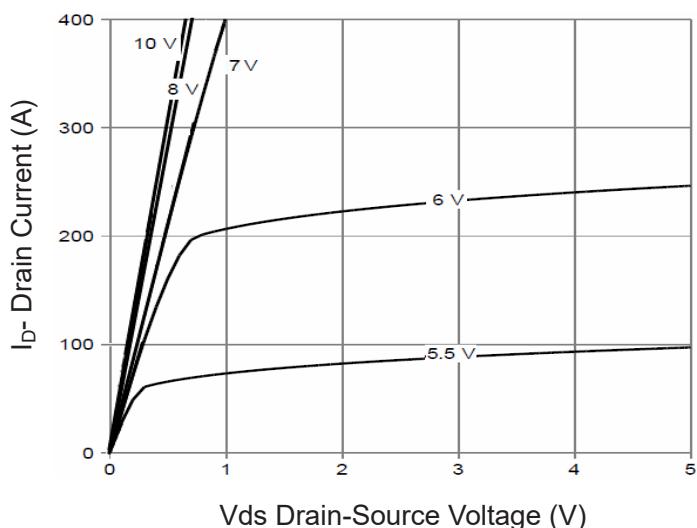


Figure 1 Output Characteristics

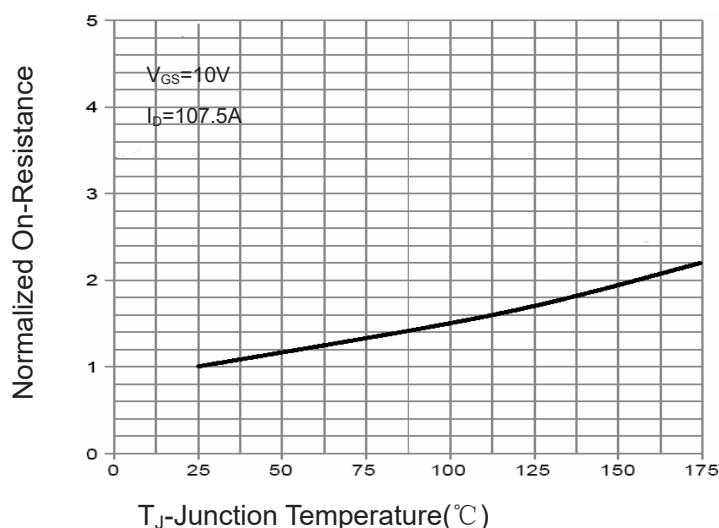


Figure 4 R_{DSON} -Junction Temperature

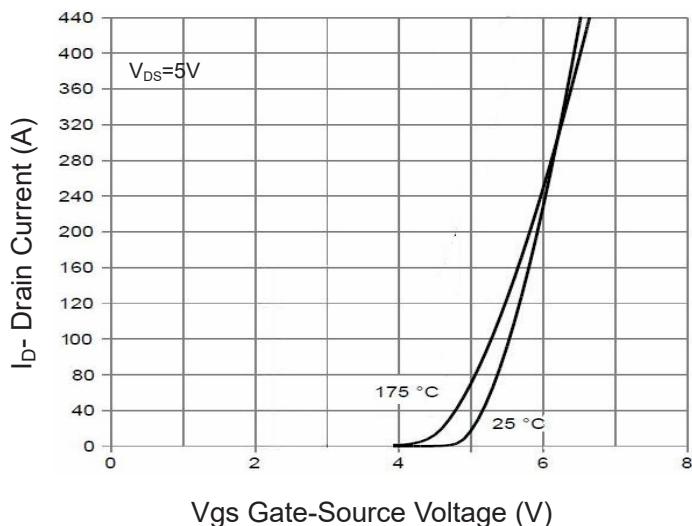


Figure 2 Transfer Characteristics

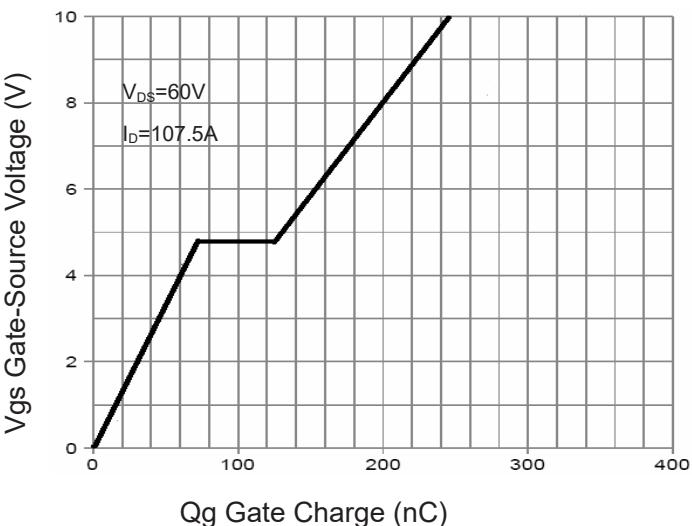


Figure 5 Gate Charge

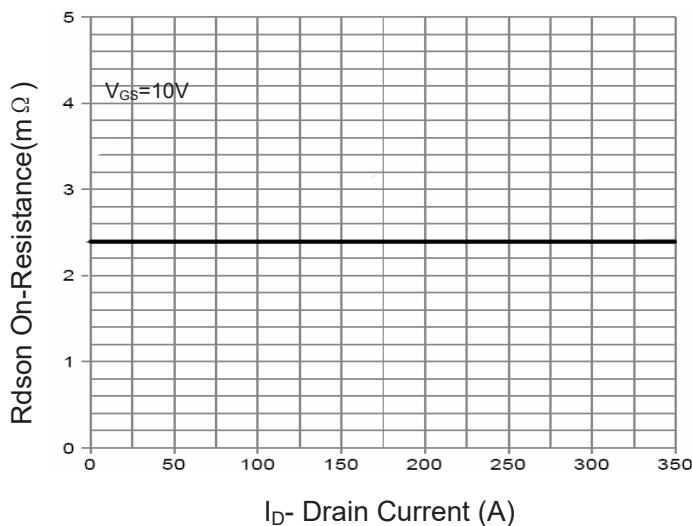


Figure 3 R_{DSON} - Drain Current

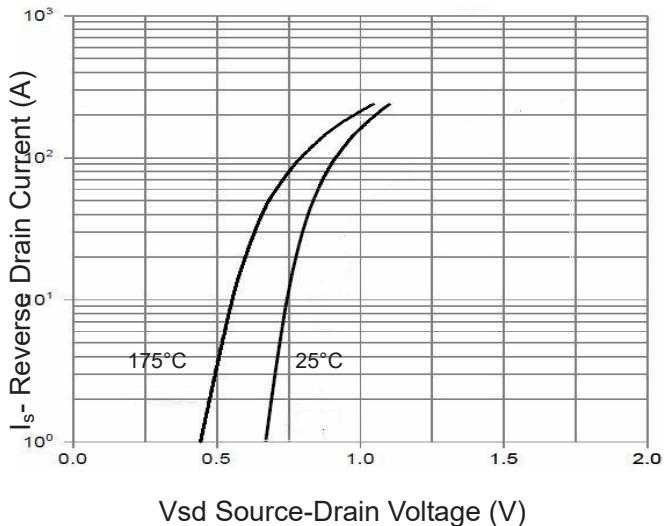


Figure 6 Source- Drain Diode Forward

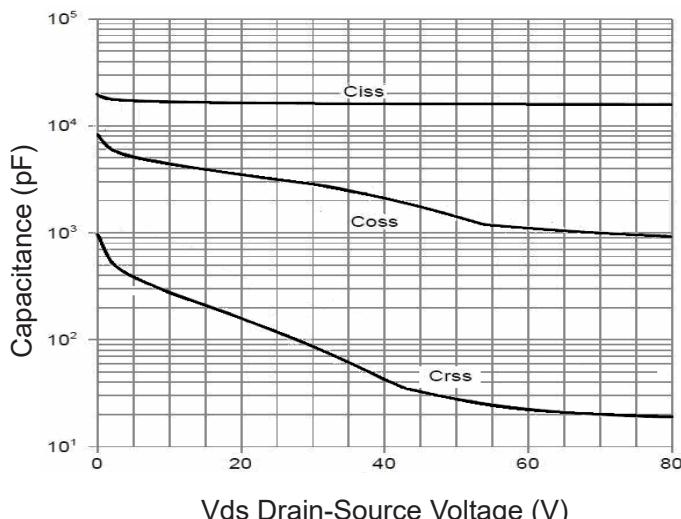


Figure 7 Capacitance vs Vds

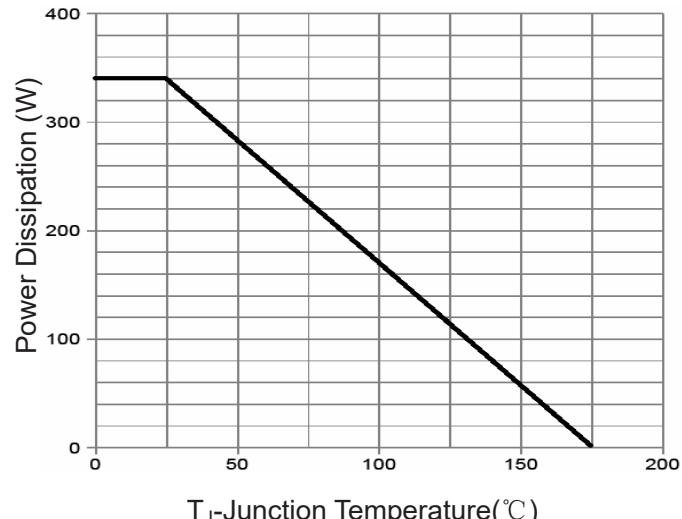


Figure 9 Power De-rating

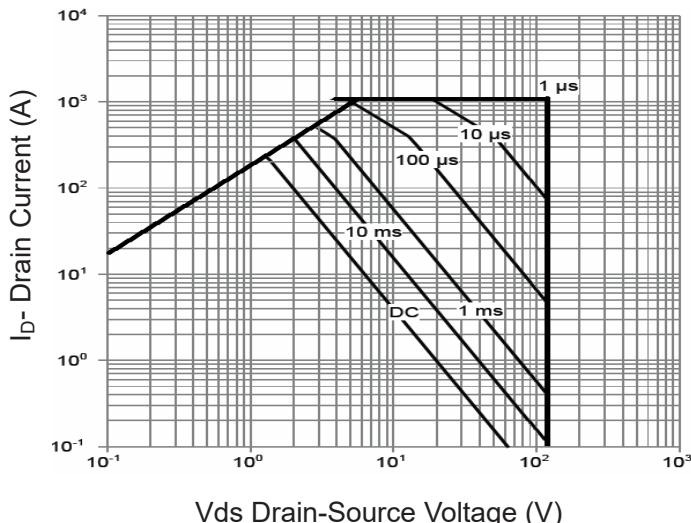


Figure 8 Safe Operation Area

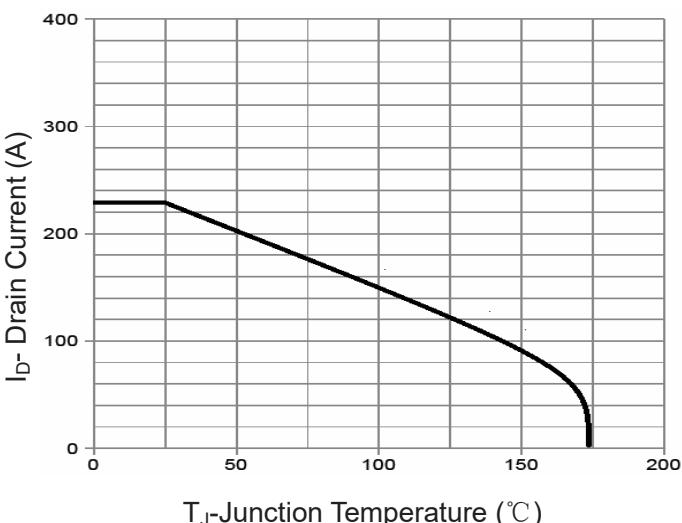


Figure 10 Current De-rating


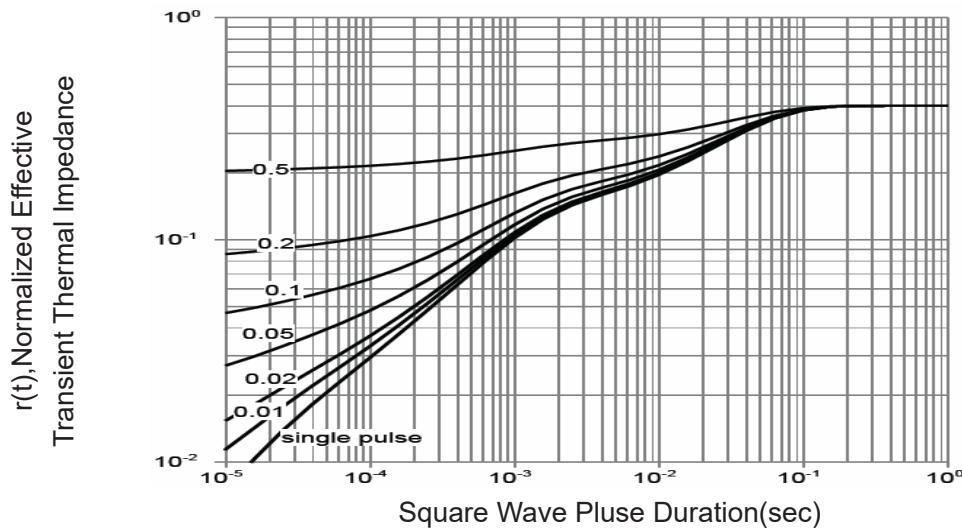


Figure 11 Normalized Maximum Transient Thermal Impedance

TO-220-3L Package Information

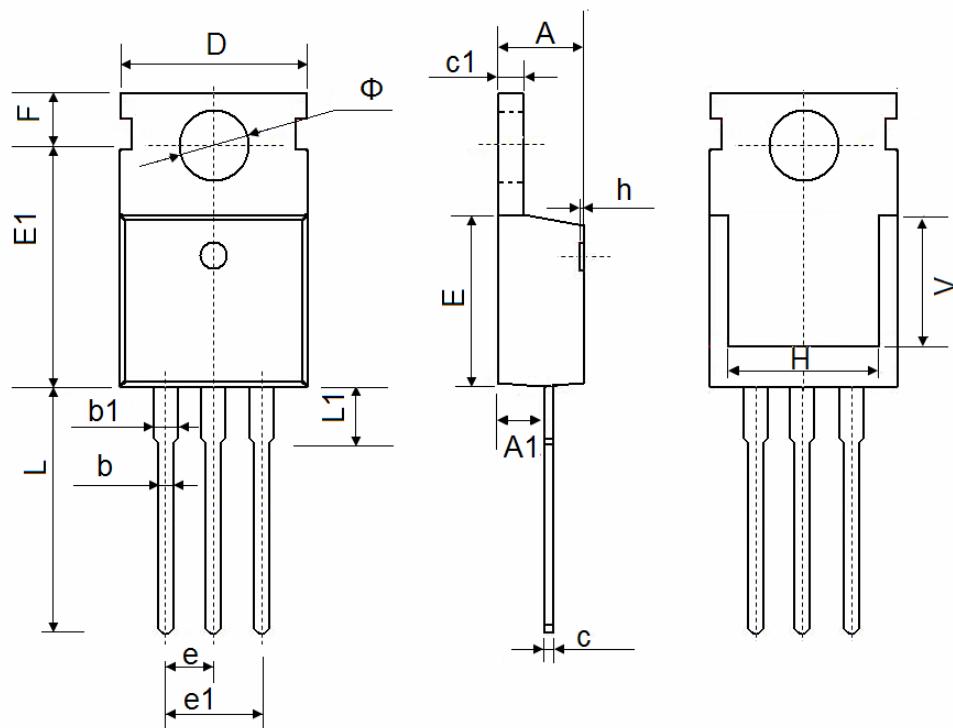

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	4.400	4.600	0.173	0.181
A1	2.250	2.550	0.089	0.100
b	0.710	0.910	0.028	0.036
b1	1.170	1.370	0.046	0.054
c	0.330	0.650	0.013	0.026
c1	1.200	1.400	0.047	0.055
D	9.910	10.250	0.390	0.404
E	8.9500	9.750	0.352	0.384
E1	12.650	12.950	0.498	0.510
e	2.540 TYP.		0.100 TYP.	
e1	4.980	5.180	0.196	0.204
F	2.650	2.950	0.104	0.116
H	7.900	8.100	0.311	0.319
h	0.000	0.300	0.000	0.012
L	12.900	13.400	0.508	0.528
L1	2.850	3.250	0.112	0.128
V	6.900 REF.		0.276 REF.	
Φ	3.400	3.800	0.134	0.150