

Description


The BSS84 uses advanced trench technology and design to provide excellent $R_{DS(ON)}$ with low gate charge. It can be used in a wide variety of applications.

General Features


- $V_{DS} = -60V, I_D = -0.23A$
 $R_{DS(ON)} < 3.5\Omega @ V_{GS} = -10V$ (Typ: 3Ω)
 $R_{DS(ON)} < 4.5\Omega @ V_{GS} = -4.5V$ (Typ: 3.9Ω)
ESD Rating: 2500V HBM
- High density cell design for ultra low R_{dson}
- Fully characterized avalanche voltage and current
- Excellent package for good heat dissipation

Application

- Power switching application
- Hard switched and high frequency circuits
- Uninterruptible power supply



SOT-23



Schematic

Package Marking and Ordering Information

Device Marking	Device	Device Package	Reel Size	Tape width	Quantity
V SMBSS84	V SMBSS84-S2	SOT-23	-	-	-

Absolute Maximum Ratings ($T_A = 25^\circ C$ unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	V_{DS}	-60	V
Gate-Source Voltage	V_{GS}	± 20	V
Drain Current-Continuous	I_D	-0.23	A
Drain Current-Pulsed (Note 1)	I_{DM}	-0.92	A
Maximum Power Dissipation	P_D	0.71	W
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 To 150	$^\circ C$

Thermal Characteristic

Thermal Resistance, Junction-to-Ambient (Note 2)	$R_{\theta JA}$	177.1	$^\circ C/W$
--	-----------------	-------	--------------

Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise noted)


Parameter	Symbol	Condition	Min	Typ	Max	Unit
Off Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V, I_D=-250\mu A$	-60	-	-	V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=-60V, V_{GS}=0V$	-	-	1	μA
Gate-Body Leakage Current	I_{GSS}	$V_{GS}=\pm 20V, V_{DS}=0V$	-	-	± 10	μA
On Characteristics (Note 3)						
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=-250\mu A$	-1.2	-1.8	-2.4	V
Drain-Source On-State Resistance	$R_{DS(ON)}$	$V_{GS}=-10V, I_D=-0.15A$	-	3	3.5	Ω
		$V_{GS}=-4.5V, I_D=-0.15A$	-	3.9	4.5	
Forward Transconductance	g_{FS}	$V_{DS}=-5V, I_D=-0.15A$	-	2.3	-	S
Dynamic Characteristics (Note4)						
Input Capacitance	C_{iss}	$V_{DS}=-30V, V_{GS}=0V,$ $F=1.0MHz$	-	21.8	-	PF
Output Capacitance	C_{oss}		-	6.5	-	PF
Reverse Transfer Capacitance	C_{rss}		-	2.1	-	PF
Switching Characteristics (Note 4)						
Turn-on Delay Time	$t_{d(on)}$	$V_{DD}=-30V, R_L=19\Omega$ $V_{GS}=-10V, R_G=3\Omega$	-	11	-	nS
Turn-on Rise Time	t_r		-	19	-	nS
Turn-Off Delay Time	$t_{d(off)}$		-	125	-	nS
Turn-Off Fall Time	t_f		-	53	-	nS
Total Gate Charge	Q_g	$V_{DS}=-30V, I_D=-0.15A,$ $V_{GS}=-10V$	-	4	-	nC
Gate-Source Charge	Q_{gs}		-	0.9	-	nC
Gate-Drain Charge	Q_{gd}		-	0.6	-	nC
Drain-Source Diode Characteristics						
Diode Forward Voltage (Note 3)	V_{SD}	$V_{GS}=0V, I_S=-0.15A$	-	-	-1.2	V
Diode Forward Current (Note 2)	I_S		-	-	-0.23	A

Notes:


1. Repetitive Rating: Pulse width limited by maximum junction temperature.
2. Surface Mounted on FR4 Board, $t \leq 10$ sec.
3. Pulse Test: Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2\%$.
4. Guaranteed by design, not subject to production

Test Circuit


1) E_{AS} test circuit

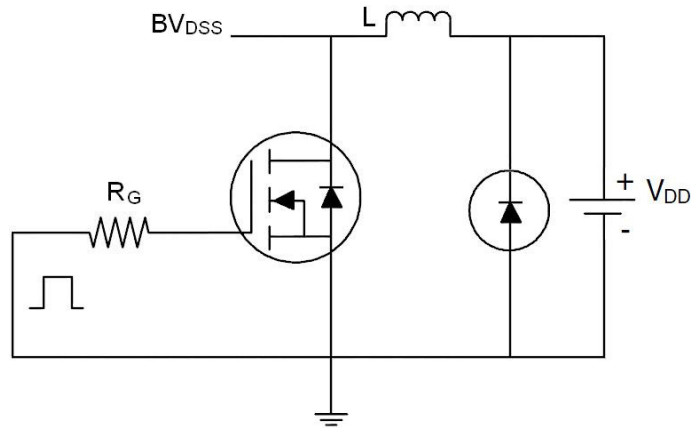

2) Gate charge test circuit

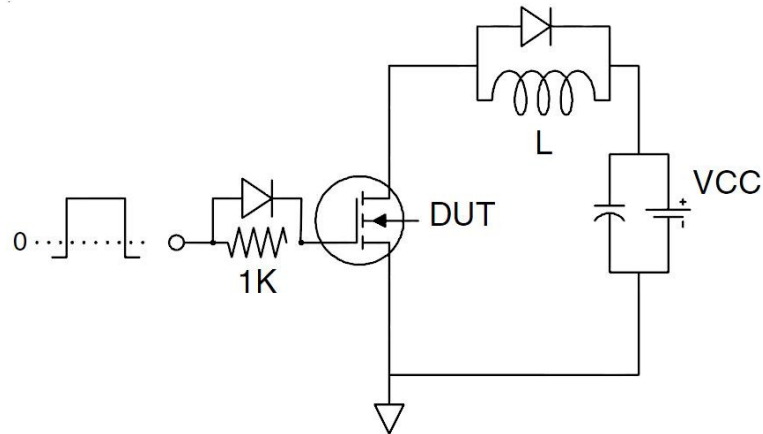

3) Switch Time Test Circuit

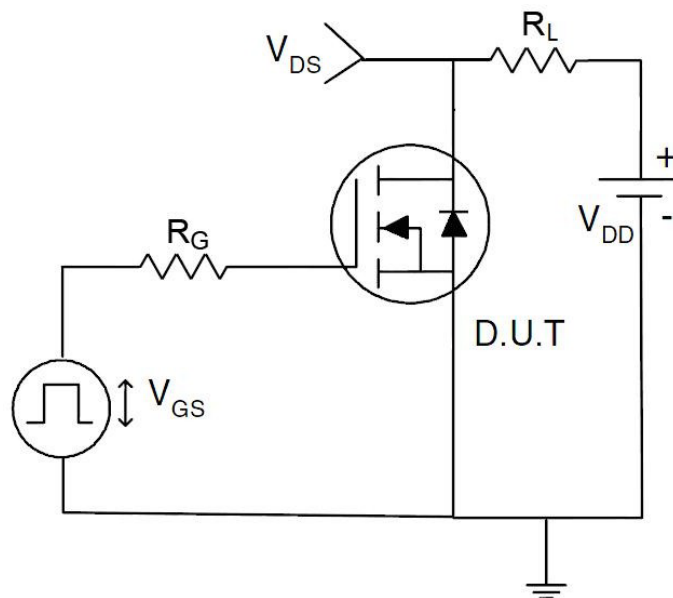

Typical Electrical and Thermal Characteristics (Curves)

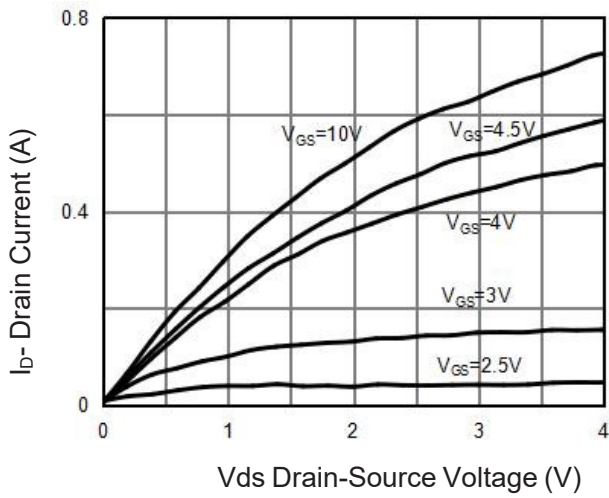


Figure 1 Output Characteristics

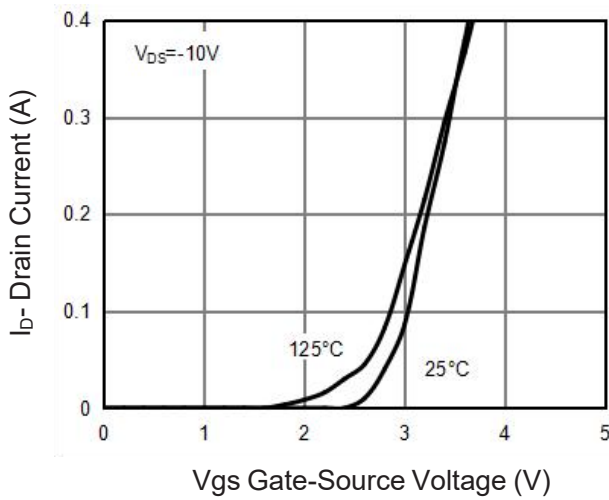


Figure 2 Transfer Characteristics

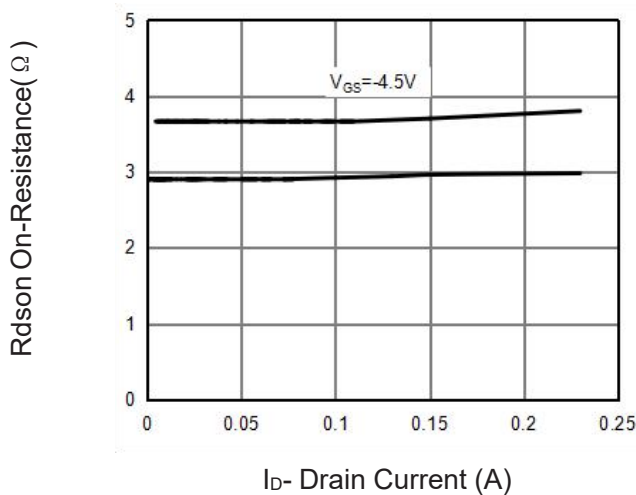


Figure 3 $R_{DS(on)}$ - Drain Current

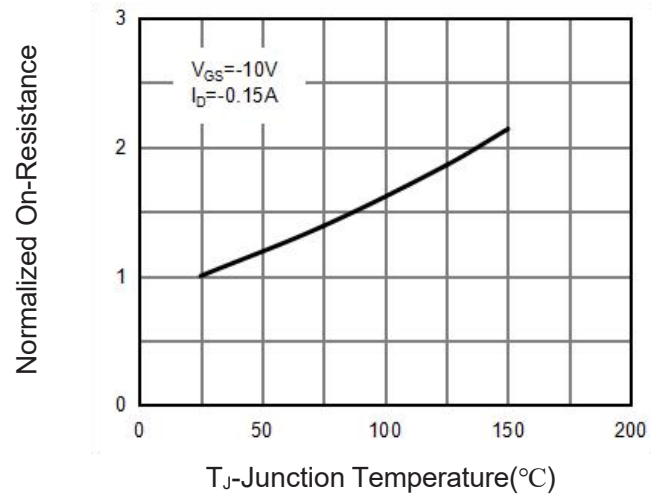


Figure 4 $R_{DS(on)}$ -Junction Temperature

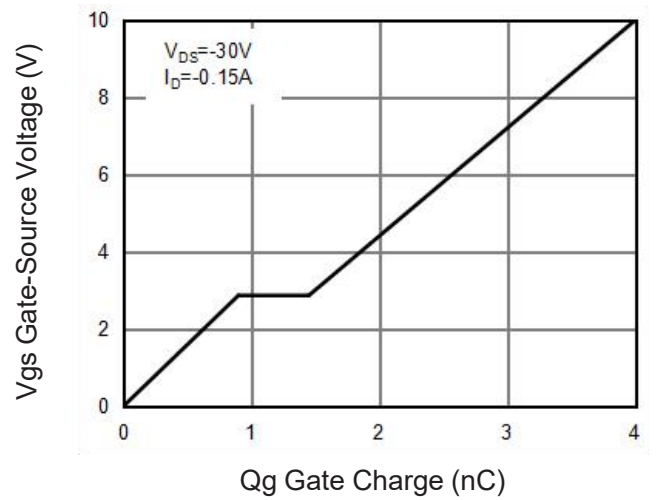


Figure 5 Gate Charge

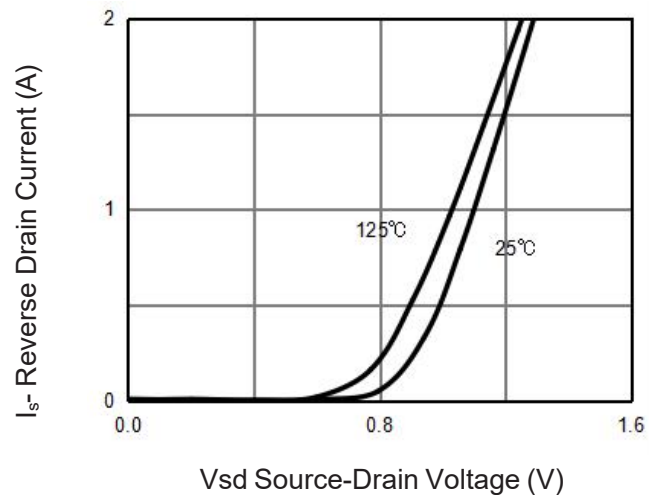
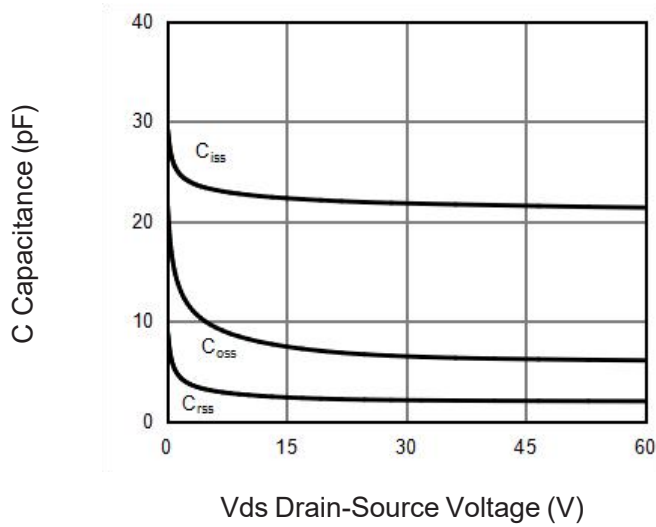
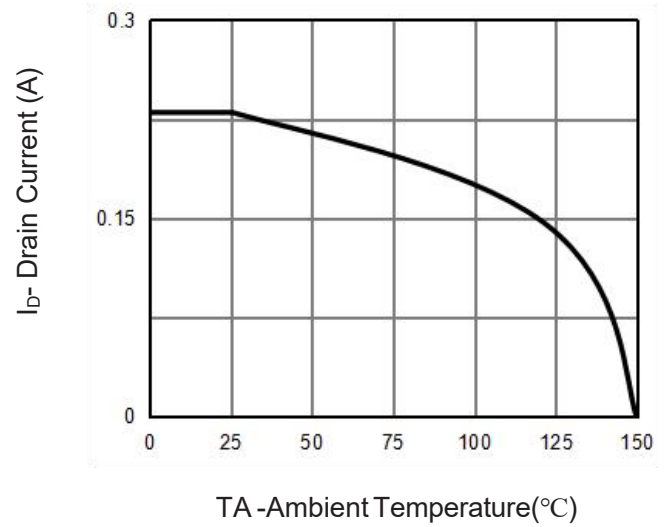
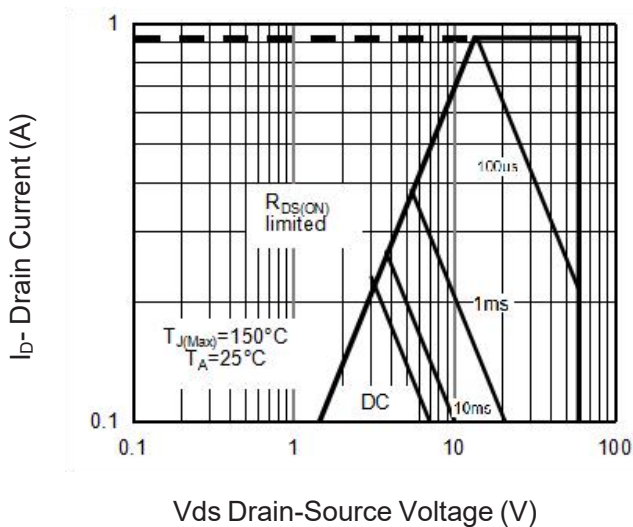
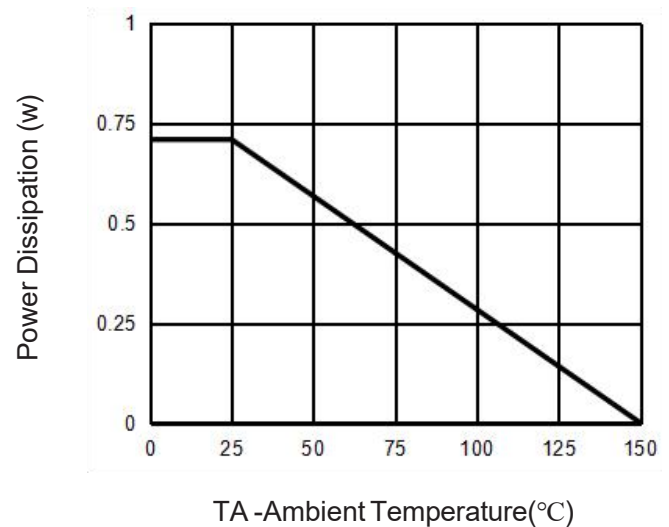
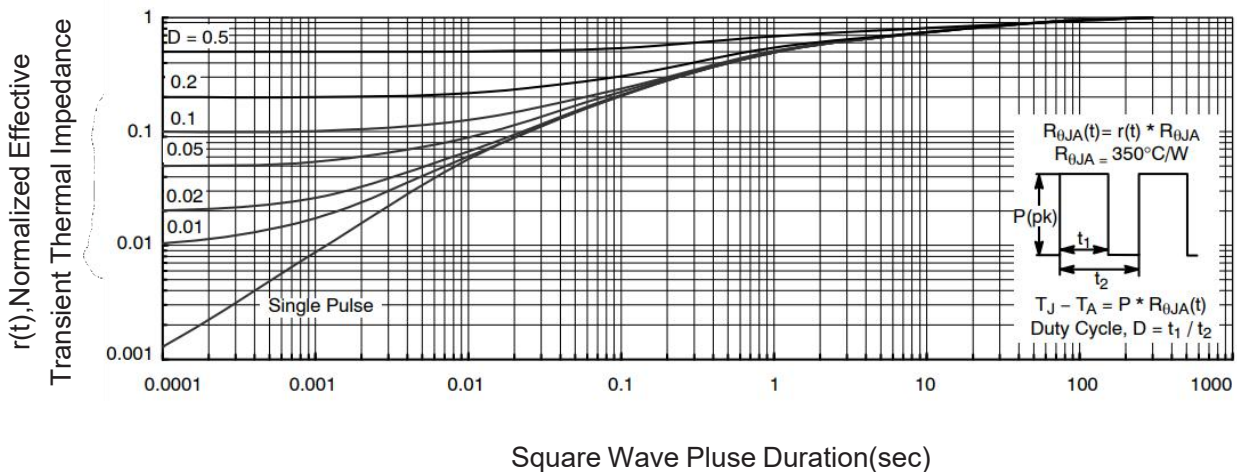


Figure 6 Source- Drain Diode Forward


Figure 7 Capacitance vs Vds

Figure 9 Current De-rating

Figure 8 Safe Operation Area

Figure 10 Power De-rating

Figure 11 Normalized Maximum Transient Thermal Impedance