Description

The VST15P900 uses **Super Trench** technology that is uniquely optimized to provide the most efficient high frequency switching performance. Both conduction and switching power losses are minimized due to an extremely low combination of $R_{DS(ON)}$ and Q_g. This device is ideal for high-frequency switching and synchronous rectification

Application

- DC/DC Converter
- Ideal for high-frequency switching and synchronous rectification

General Features

- V_{DS} =-150V,I_D =-29.5A
  $R_{DS(ON)}$=90mΩ (typical) @ V_{GS}=-10V
  $R_{DS(ON)}$=107mΩ (typical) @ V_{GS}=-4.5V
- Excellent gate charge x $R_{DS(on)}$ product(FOM)
- Very low on-resistance $R_{DS(on)}$
- 175 °C operating temperature
- Pb-free lead plating

TO-252



Schematic

Package Marking and Ordering Information

Device Marking	Device	Device Package	Reel Size	Tape width	Quantity
VST15P900	VST15P900-T2	TO-252	-	-	-

Absolute Maximum Ratings (T_C=25℃unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	V_{DS}	-150	V
Gate-Source Voltage	V_{GS}	±20	V
Drain Current-Continuous	I_D	-29.5	A
Drain Current-Continuous(T_C=100℃)	I_D (100℃)	-20.6	A
Pulsed Drain Current	I_{DM}	-118	A
Maximum Power Dissipation	P_D	235	W
Derating factor		1.57	W/℃
Single pulse avalanche energy (Note 1)	E_{AS}	207	mJ
Operating Junction and Storage Temperature Range	T_J,T_{STG}	-55 To 175	℃

Thermal Characteristic

Thermal Resistance,Junction-to-Case	$R_{\theta JC}$	0.64	℃/W

Electrical Characteristics (T_C=25℃unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Off Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	V_{GS}=0V I_D=-250μA	-150	-	-	V
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS}=-150V,V_{GS}=0V	-	-	-1	μA
Gate-Body Leakage Current	I_{GSS}	V_{GS}=±20V,V_{DS}=0V	-	-	±100	nA
On Characteristics						
Gate Threshold Voltage	$V_{GS(th)}$	V_{DS}=V_{GS},I_D=-250μA	-1.2	-1.7	-2.5	V
Drain-Source On-State Resistance	$R_{DS(ON)}$	V_{GS}=-10V, I_D=-15A	-	90	105	mΩ
		V_{GS}=-4.5V, I_D=-15A	-	107	125	mΩ
Forward Transconductance	g_{FS}	V_{DS}=-5V,I_D=-15A	-	30	-	S
Dynamic Characteristics						
Input Capacitance	C_{lss}	V_{DS}=-75V,V_{GS}=0V, F=1.0MHz	-	1650	-	PF
Output Capacitance	C_{oss}		-	135	-	PF
Reverse Transfer Capacitance	C_{rss}		-	12	-	PF
Switching Characteristics (Note 2)						
Turn-on Delay Time	$t_{d(on)}$	V_{DD}=-50V,I_D=-15A V_{GS}=-10V,R_G=1.6Ω	-	10	-	nS
Turn-on Rise Time	t_r		-	18	-	nS
Turn-Off Delay Time	$t_{d(off)}$		-	20	-	nS
Turn-Off Fall Time	t_f		-	15	-	nS
Total Gate Charge	Q_g	V_{DS}=-75V,I_D=-15A, V_{GS}=-10V	-	25	-	nC
Gate-Source Charge	Q_{gs}		-	5.2	-	nC
Gate-Drain Charge	Q_{gd}		-	3.1	-	nC
Drain-Source Diode Characteristics						
Diode Forward Voltage	V_{SD}	V_{GS}=0V,I_S=-15A	-		-1.2	V
Diode Forward Current	I_S		-	-	-29.5	A
Reverse Recovery Time	t_{rr}	T_J = 25°C, I_F =-15A di/dt = 100A/μs	-	55	-	nS
Reverse Recovery Charge	Qrr		-	101	-	nC

Notes:

1. EAS condition : Tj=25℃,V_{DD}=-50V,V_G=-10V,L=0.5mH,Rg=25Ω
2. Guaranteed by design, not subject to production
3. These curves are based on the junction-to-case thermal impedance which is measured with the device mounted to a large heatsink, assuming a maximum junction temperature of TJ(MAX)=175°C. The SOA curve provides a single pulse rating.

Typical Electrical and Thermal Characteristics

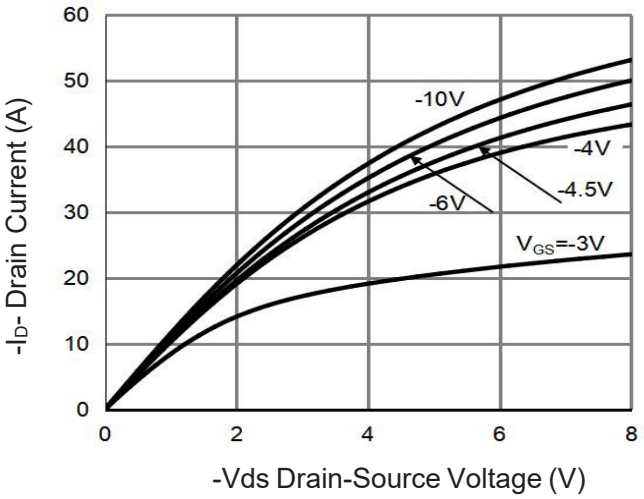

Figure 1 Output Characteristics

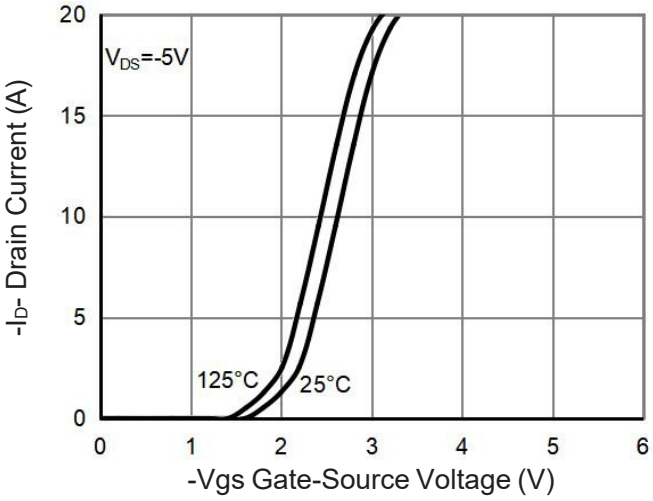

Figure 2 Transfer Characteristics

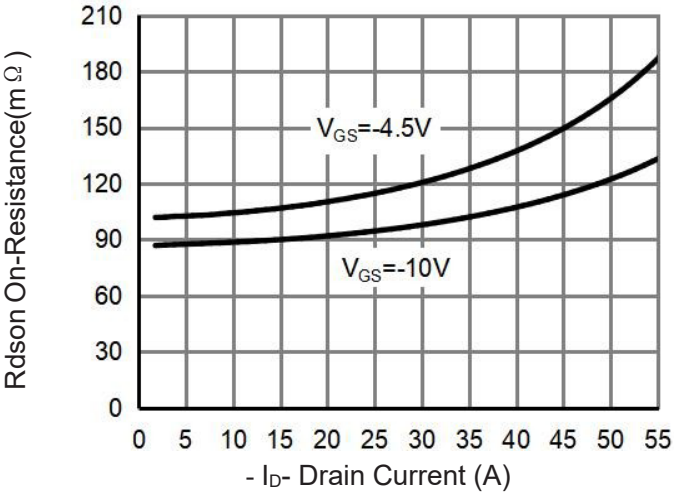

Figure 3 Rdson- Drain Current

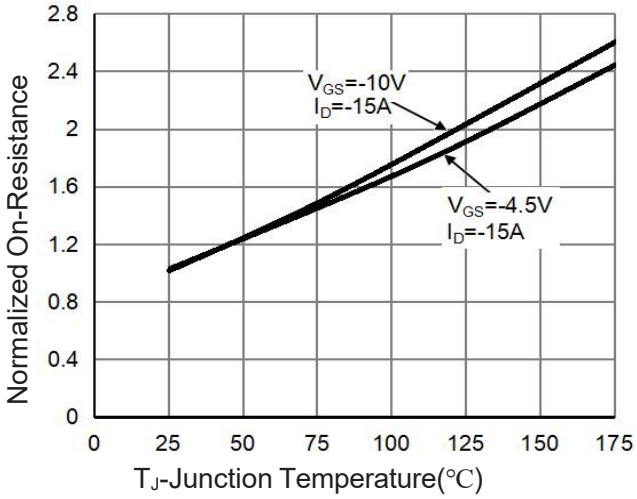

Figure 4 Rdson-JunctionTemperature

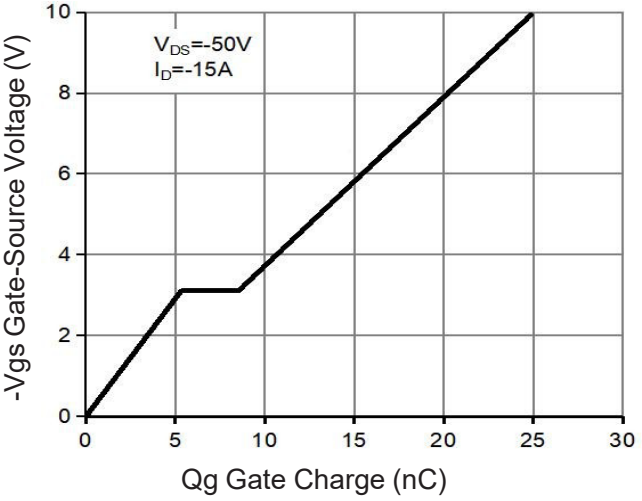

Figure 5 Gate Charge

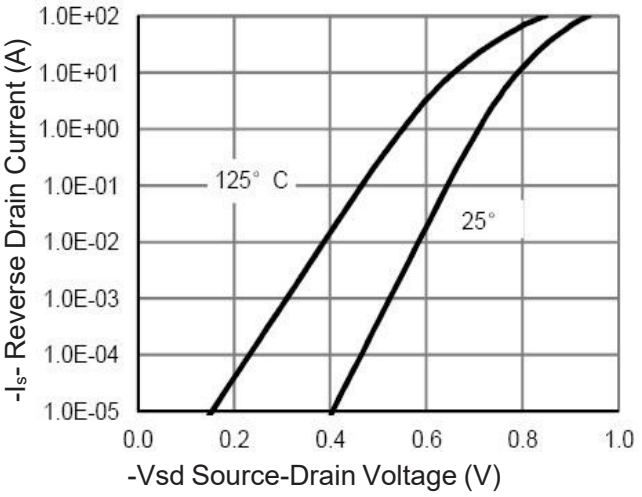

Figure 6 Source- Drain Diode Forward

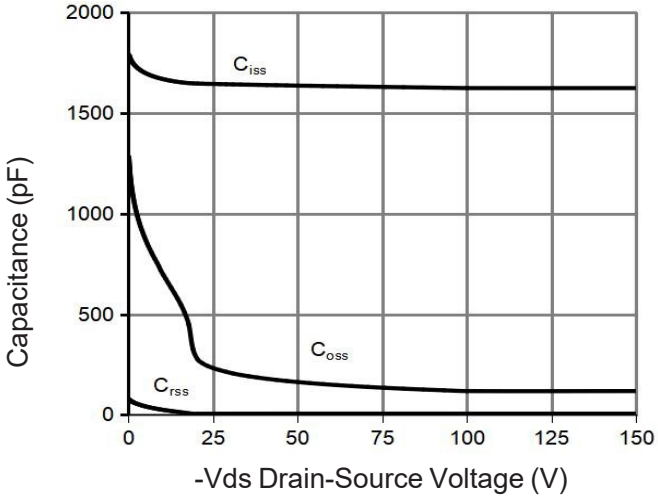

Figure 7 Capacitance vs Vds

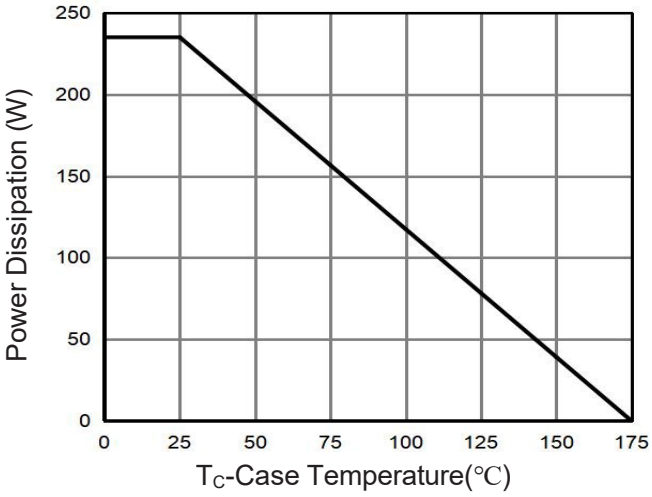

Figure 9 Power De-rating

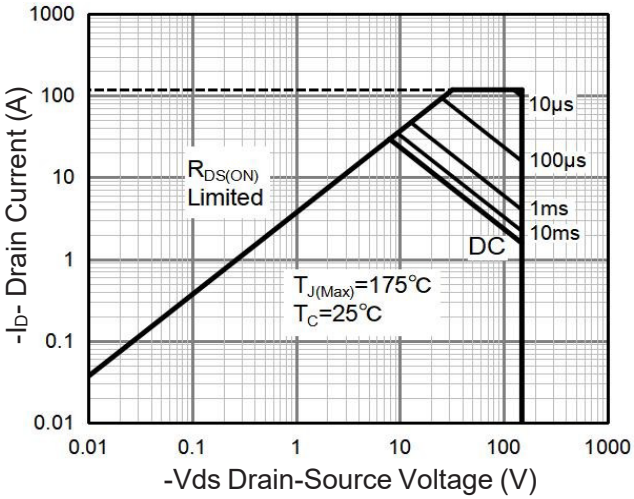

Figure 8 Safe Operation Area(Note 3)

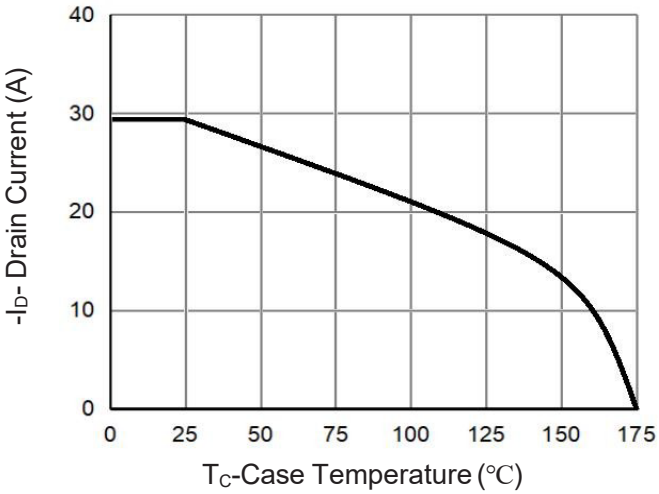

Figure 10 Current De-rating

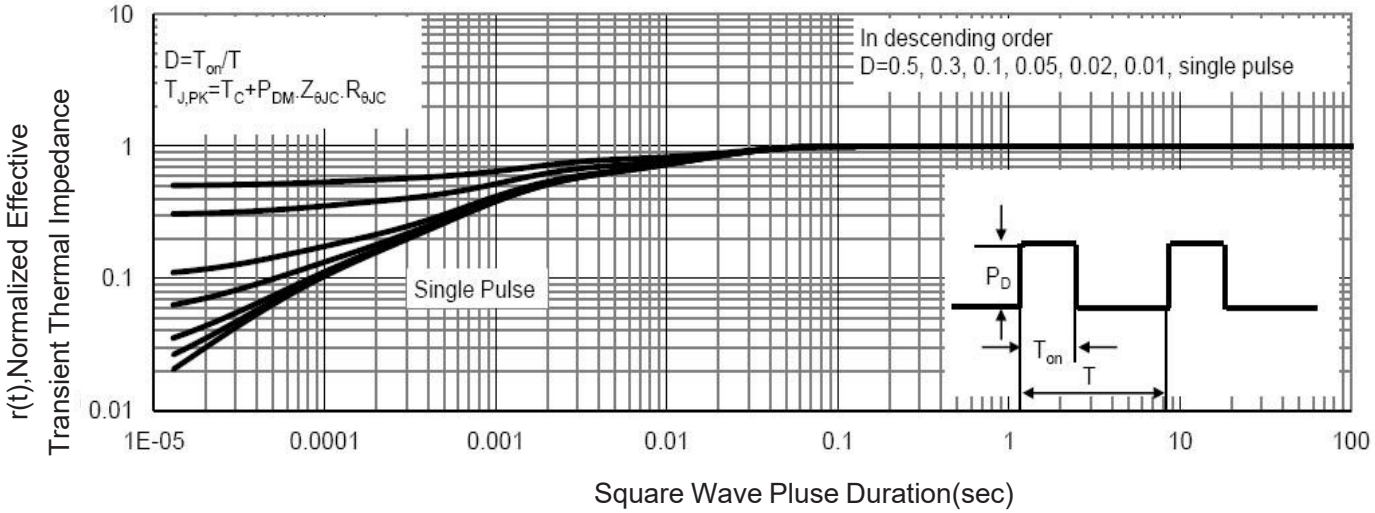

Figure 11 Normalized Maximum Transient Thermal Impedance