

Description

The VST02N010 uses **Super Trench II** technology that is uniquely optimized to provide the most efficient high frequency switching performance. Both conduction and switching power losses are minimized due to an extremely low combination of $R_{DS(ON)}$ and Q_g . This device is ideal for high-frequency switching and synchronous rectification.

Application


- DC/DC Converter
- Ideal for high-frequency switching and synchronous rectification

General Features

- $V_{DS}=25V, I_D=161A$
- $R_{DS(ON)}=1.1m\Omega$ (typical) @ $V_{GS}=10V$
- $R_{DS(ON)}=1.8m\Omega$ (typical) @ $V_{GS}=4.5V$
- Excellent gate charge x $R_{DS(on)}$ product(FOM)
- Very low on-resistance $R_{DS(on)}$
- 150°C operating temperature
- Pb-free lead plating



DFN3x3



Schematic

Package Marking and Ordering Information

Device Marking	Device	Device Package	Reel Size	Tape width	Quantity
VST02N010	VST02N010-D33	DFN3x3	Ø330mm	12mm	5000units

Absolute Maximum Ratings ($T_c=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	V_{DS}	25	V
Gate-Source Voltage	V_{GS}	± 20	V
Drain Current-Continuous	I_D	161	A
Drain Current-Continuous($T_c=100^\circ\text{C}$)	$I_D(100^\circ\text{C})$	102	A
Pulsed Drain Current	I_{DM}	644	A
Maximum Power Dissipation	P_D	69	W
Derating factor		0.55	W/°C
Single pulse avalanche energy (Note 1)	E_{AS}	540	mJ
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 To 150	°C

Thermal Characteristic

Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	1.81	°C/W
--------------------------------------	-----------------	------	------

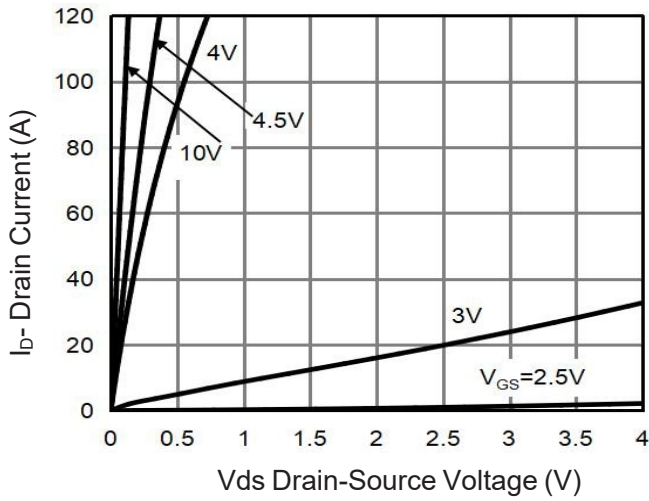
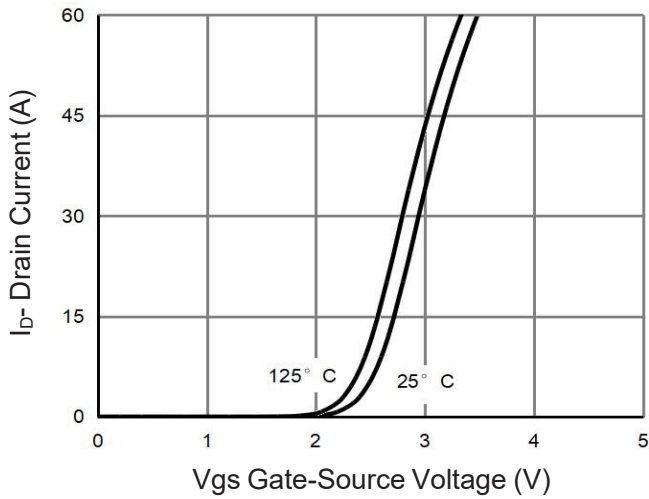
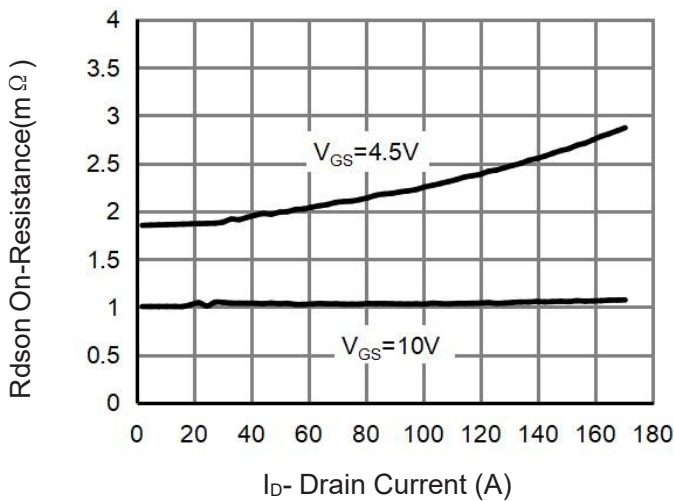
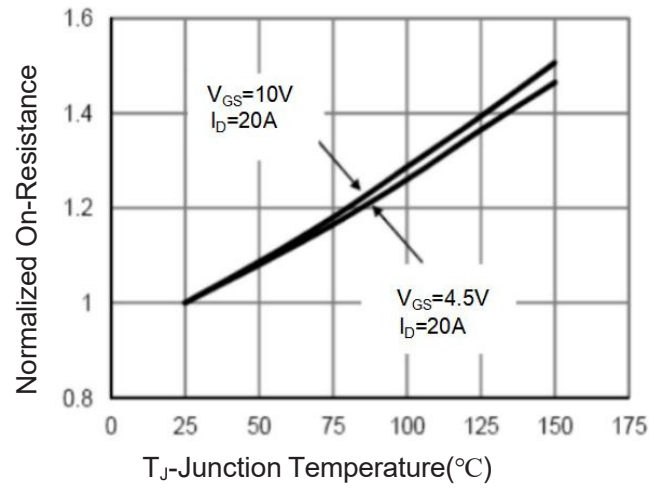
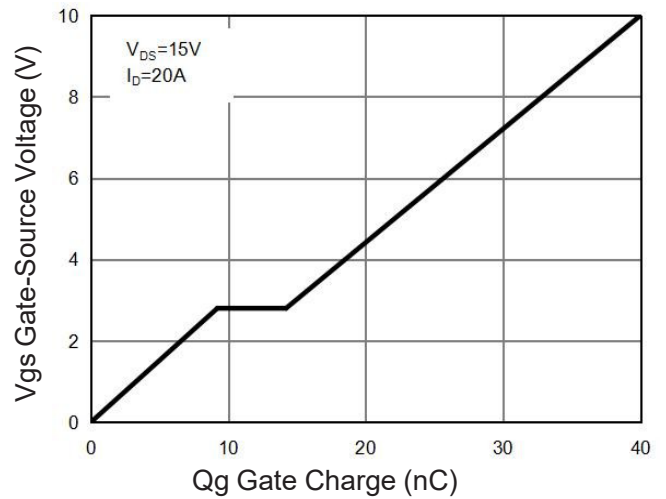
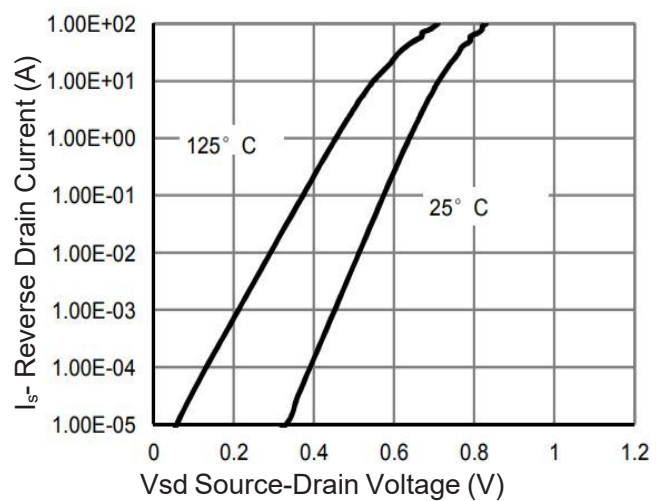
Electrical Characteristics (T_c=25°C unless otherwise noted)

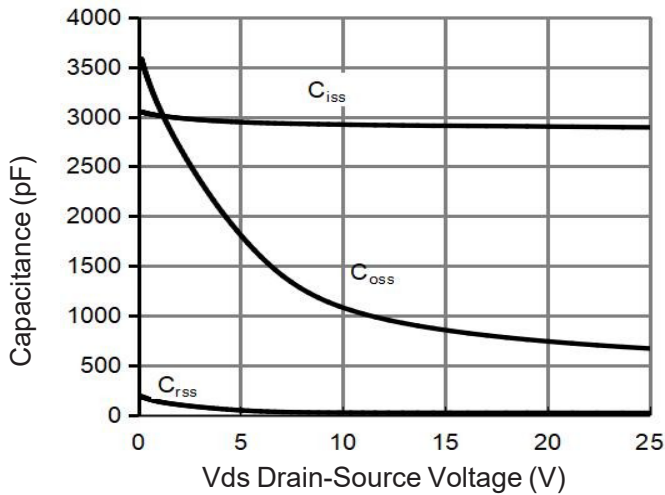
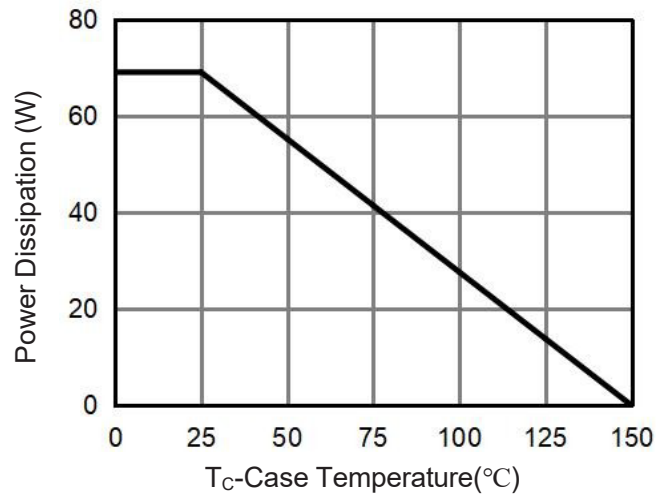
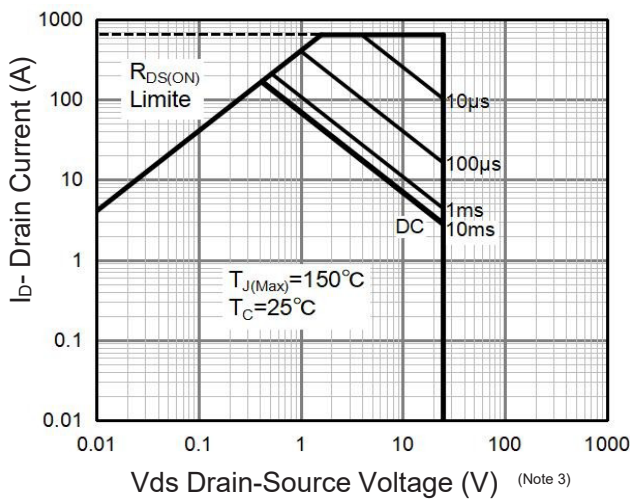
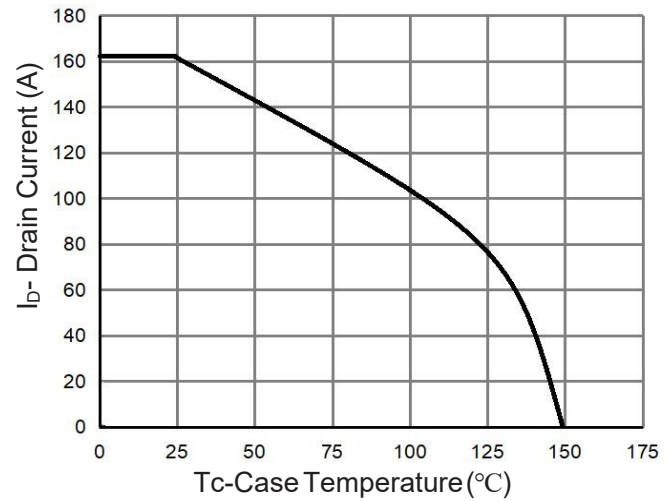
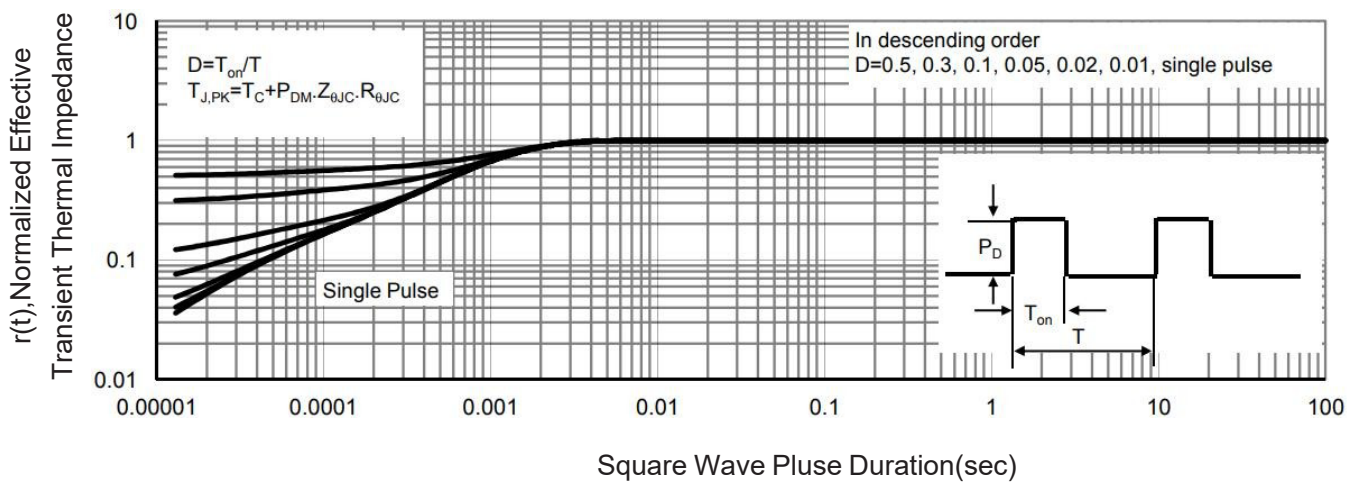
Parameter	Symbol	Condition	Min	Typ	Max	Unit
Off Characteristics						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V I _D =250μA	25	-	-	V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =25V, V _{GS} =0V	-	-	1	μA
Gate-Body Leakage Current	I _{GSS}	V _{GS} =±20V, V _{DS} =0V	-	-	±100	nA
On Characteristics						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250μA	1.0	1.5	2.5	V
Drain-Source On-State Resistance	R _{DS(ON)}	V _{GS} =10V, I _D =20A	-	1.1	1.65	mΩ
		V _{GS} =4.5V, I _D =20A	-	1.8	2.75	mΩ
Forward Transconductance	g _{FS}	V _{DS} =5V, I _D =30A	-	50	-	S
Dynamic Characteristics						
Input Capacitance	C _{iss}	V _{DS} =15V, V _{GS} =0V, F=1.0MHz	-	2900	-	pF
Output Capacitance	C _{oss}		-	805	-	pF
Reverse Transfer Capacitance	C _{rss}		-	80	-	pF
Switching Characteristics (Note 2)						
Turn-on Delay Time	t _{d(on)}	V _{DD} =15V, I _D =20A V _{GS} =10V, R _G =1.6Ω	-	8	-	nS
Turn-on Rise Time	t _r		-	7	-	nS
Turn-Off Delay Time	t _{d(off)}		-	35	-	nS
Turn-Off Fall Time	t _f		-	12	-	nS
Total Gate Charge	Q _g	V _{DS} =15V, I _D =20A, V _{GS} =10V	-	40	-	nC
Gate-Source Charge	Q _{gs}		-	9.2	-	nC
Gate-Drain Charge	Q _{gd}		-	5.0	-	nC
Drain-Source Diode Characteristics						
Diode Forward Voltage	V _{SD}	V _{GS} =0V, I _S =20A	-	-	1.2	V
Diode Forward Current	I _S		-	-	161	A
Reverse Recovery Time	t _{rr}	T _J = 25°C, I _F =100A	-	22	-	nS
Reverse Recovery Charge	Q _{rr}	di/dt = 100A/μs	-	40	-	nC

Notes:

1. EAS condition : T_J=25°C, V_{DD}=15V, V_G=10V, L=0.5mH, R_G=25Ω
2. Guaranteed by design, not subject to production
3. These curves are based on the junction-to-case thermal impedance which is measured with the device mounted to a large heatsink, assuming a maximum junction temperature of T_{J(MAX)}=150°C. The SOA curve provides a single pulse rating.

Typical Electrical and Thermal Characteristics


Figure 1 Output Characteristics

Figure 2 Transfer Characteristics

Figure 3 Rdson- Drain Current

Figure 4 Rdson-Junction Temperature

Figure 5 Gate Charge

Figure 6 Source- Drain Diode Forward


Figure 7 Capacitance vs Vds

Figure 9 Power De-rating

Figure 8 Safe Operation Area

Figure 10 Current De-rating

Figure 11 Normalized Maximum Transient Thermal Impedance