

Description

The series of devices uses **Super Trench II** technology that is uniquely optimized to provide the most efficient high frequency switching performance. Both conduction and switching power losses are minimized due to an extremely low combination of $R_{DS(ON)}$ and Q_g . This device is ideal for high-frequency switching and synchronous rectification.

Application


- DC/DC Converter
- Ideal for high-frequency switching and synchronous rectification

General Features

- $V_{DS}=85V, I_D=400A$
 $R_{DS(ON)}=1.0m\Omega$, typical@ $V_{GS}=10V$
- Excellent gate charge x $R_{DS(on)}$ product(FOM)
- Very low on-resistance $R_{DS(on)}$
- 175 °C operating temperature
- Pb-free lead plating



TOLL



Schematic

Package Marking and Ordering Information

Device Marking	Device	Device Package	Reel Size	Tape width	Quantity
VST08N010	VST08N010-OL	TOLL	Ø330mm	24mm	2000 units

Absolute Maximum Ratings ($T_c=25^{\circ}C$ unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	V_{DS}	85	V
Gate-Source Voltage	V_{GS}	± 20	V
Drain Current-Continuous	I_D	400	A
Drain Current-Continuous($T_c=100^{\circ}C$)	$I_D(100^{\circ}C)$	300	A
Pulsed Drain Current	I_{DM}	1600	A
Maximum Power Dissipation	P_D	500	W
Derating factor		3.33	W/ $^{\circ}C$
Single pulse avalanche energy ^(Note 1)	E_{AS}	3800	mJ
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 To 175	$^{\circ}C$

Thermal Characteristic

Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	0.3	$^{\circ}C/W$
--------------------------------------	-----------------	-----	---------------

Electrical Characteristics ($T_c=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Off Characteristics						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V I _D =250μA	85		-	V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =85V, V _{GS} =0V	-	-	1	μA
Gate-Body Leakage Current	I _{GSS}	V _{GS} =±20V, V _{DS} =0V	-	-	±100	nA
On Characteristics						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250μA	2.0	3.0	4.0	V
Drain-Source On-State Resistance	R _{DS(ON)}	V _{GS} =10V, I _D =20A	-	1.0	1.2	mΩ
Forward Transconductance	g _{FS}	V _{DS} =5V, I _D =20A		200	-	S
Dynamic Characteristics						
Input Capacitance	C _{iss}	V _{DS} =40V, V _{GS} =0V, F=1.0MHz	-	19200	-	pF
Output Capacitance	C _{oss}		-	2900	-	pF
Reverse Transfer Capacitance	C _{rss}		-	124	-	pF
Switching Characteristics (Note 2)						
Turn-on Delay Time	t _{d(on)}	V _{DD} =40V, I _D =20A V _{GS} =10V, R _G =1.6Ω	-	37	-	nS
Turn-on Rise Time	t _r		-	21	-	nS
Turn-Off Delay Time	t _{d(off)}		-	62	-	nS
Turn-Off Fall Time	t _f		-	20	-	nS
Total Gate Charge	Q _g	V _{DS} =40V, I _D =20A, V _{GS} =10V	-	284	-	nC
Gate-Source Charge	Q _{gs}		-	78		nC
Gate-Drain Charge	Q _{gd}		-	64		nC
Drain-Source Diode Characteristics						
Diode Forward Voltage	V _{SD}	V _{GS} =0V, I _S =20A	-		1.2	V
Diode Forward Current	I _S		-	-	400	A
Reverse Recovery Time	t _{rr}	T _J = 25°C, I _F = 20A	-	147	-	nS
Reverse Recovery Charge	Q _{rr}	di/dt = 100A/μs	-	392	-	nC

Notes:

1. EAS condition : $T_J=25^{\circ}\text{C}, V_{DD}=40V, V_G=10V, L=0.5mH, R_g=25\Omega$
2. Guaranteed by design, not subject to production
3. These curves are based on the junction-to-case thermal impedance which is measured with the device mounted to a large heatsink, assuming a maximum junction temperature of $T_{J(MAX)}=175^{\circ}\text{C}$. The SOA curve provides a single pulse rating.

Typical Electrical and Thermal Characteristics

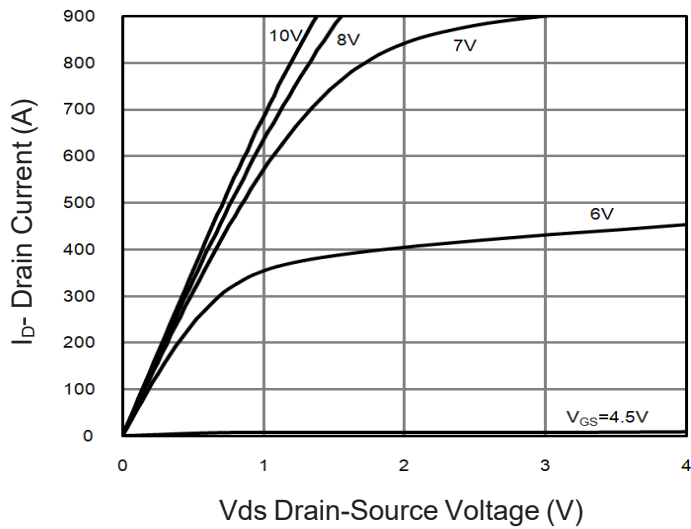


Figure 1 Output Characteristics

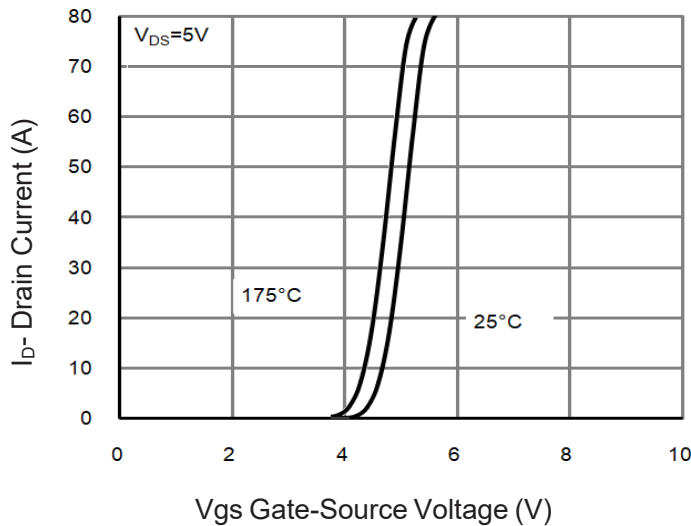


Figure 2 Transfer Characteristics

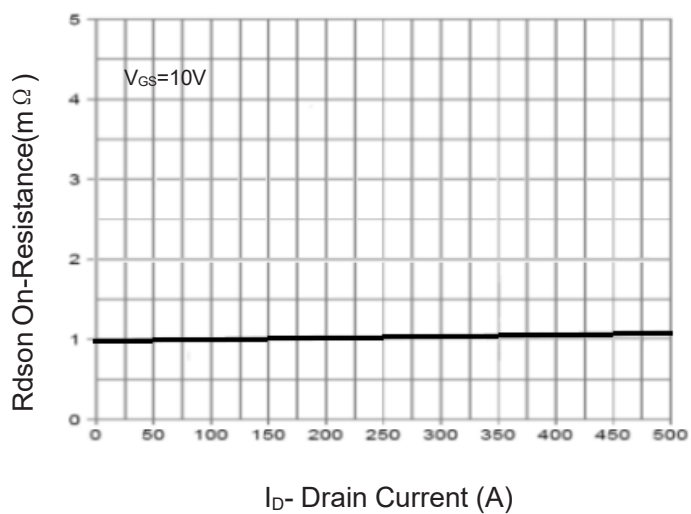


Figure 3 $R_{DS(on)}$ - Drain Current

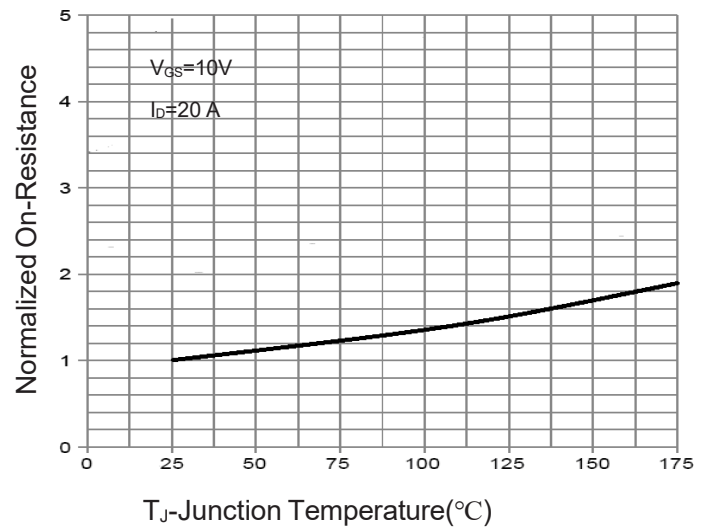


Figure 4 $R_{DS(on)}$ -Junction Temperature

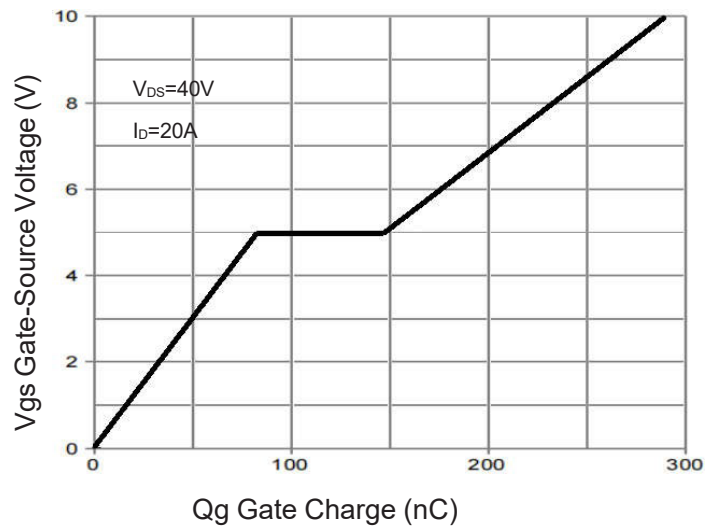


Figure 5 Gate Charge



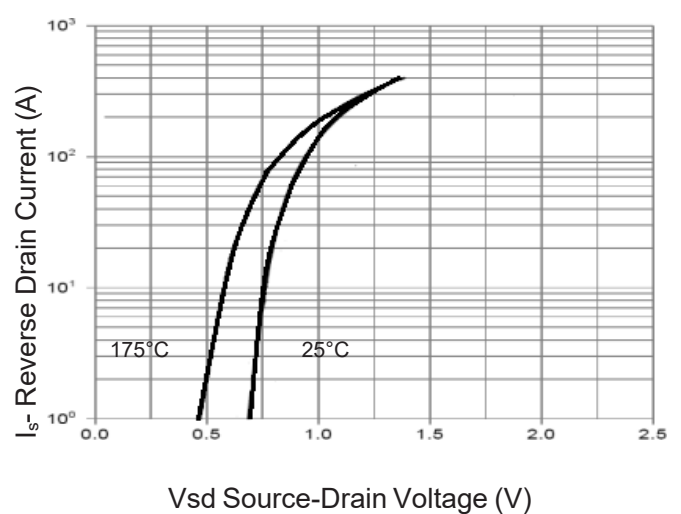



Figure 6 Source- Drain Diode Forward

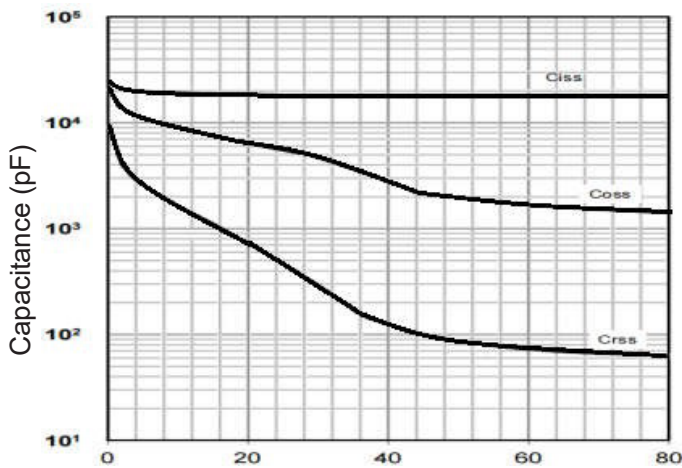


Vds Drain-Source Voltage (V)
Figure 7 Capacitance vs Vds

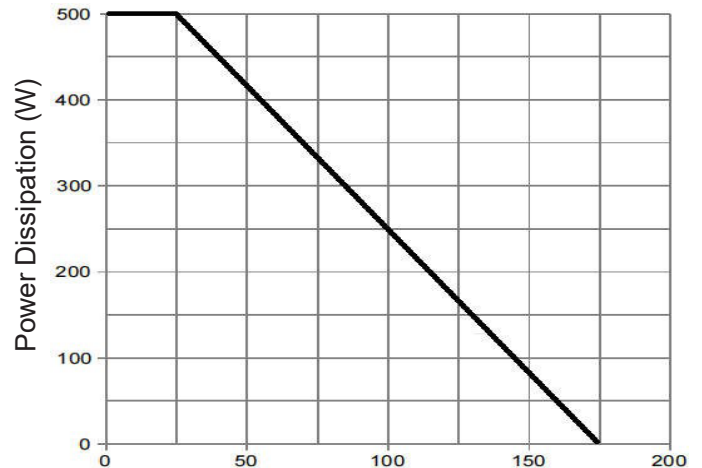


T_J-Junction Temperature(°C)
Figure 9 Power De-rating

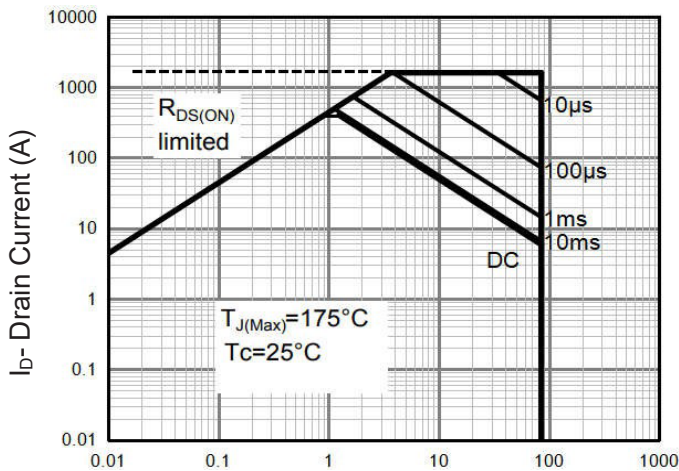

Vds Drain-Source Voltage (V)
Figure 8 Safe Operation Area (Note3)

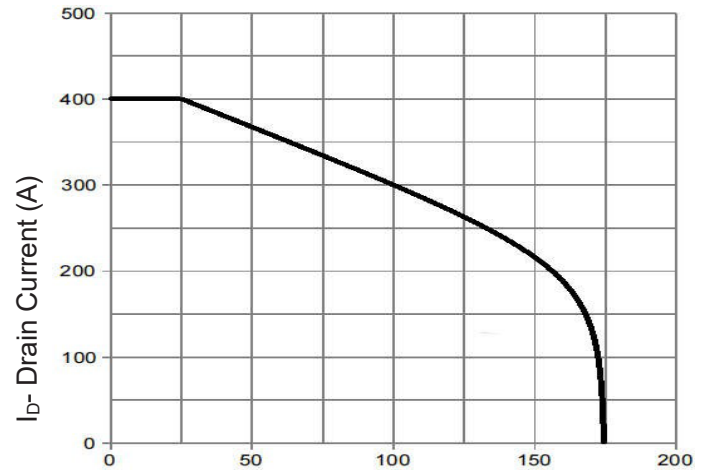

T_J-Junction Temperature (°C)
Figure 10 Current De-rating

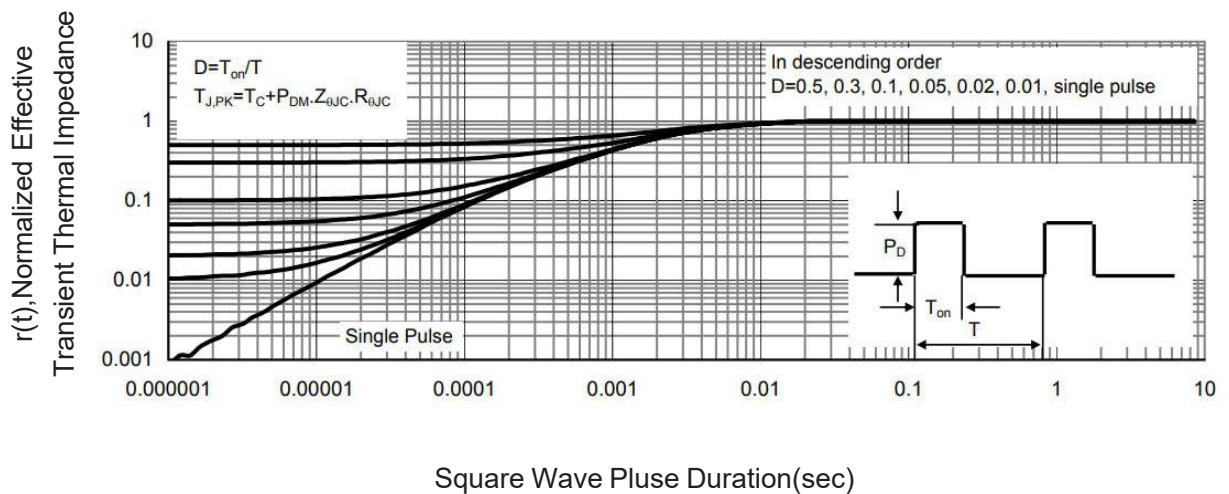

Square Wave Pulse Duration(sec)
Figure 11 Normalized Maximum Transient Thermal Impedance