

General Description


The series of devices use advanced trench gate super junction technology and design to provide excellent $R_{DS(ON)}$ with low gate charge. This super junction MOSFET fits the industry's AC-DC SMPS requirements for PFC, AC/DC power conversion, and industrial power applications.

Features


- Optimized body diode reverse recovery performance
- Low on-resistance and low conduction losses
- Small package
- Ultra Low Gate Charge cause lower driving requirements
- 100% Avalanche Tested
- ROHS compliant

Application

- Power factor correction (PFC)
- Switched mode power supplies(SMPS)
- Uninterruptible Power Supply (UPS)
- LLC Half-bridge

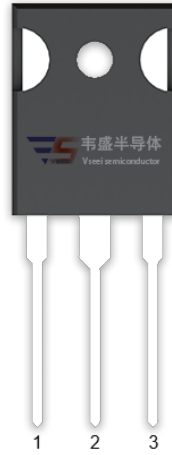

TO-247



Schematic

Parameter	Symbol	Value	Unit
Drain-Source Voltage ($V_{GS}=0V$)	V_{DS}	650	V
Gate-Source Voltage ($V_{DS}=0V$) AC ($f>1$ Hz)	V_{GS}	± 30	V
Continuous Drain Current at $T_c=25^\circ C$	$I_{D(DC)}$	28	A
Continuous Drain Current at $T_c=100^\circ C$	$I_{D(DC)}$	18	A
Pulsed drain current (Note 1)	$I_{DM(pluse)}$	112	A
Maximum Power Dissipation($T_c=25^\circ C$)	P_D	260	W
Derate above $25^\circ C$		2.08	W/ $^\circ C$
Single pulse avalanche energy (Note 2)	EAS	676	mJ
Avalanche current(Note 1)	I_{AR}	5.2	A
Repetitive Avalanche energy , t_{AR} limited by T_{jmax} (Note 1)	E_{AR}	3.2	mJ

Parameter	Symbol	Value	Unit
Drain Source voltage slope, $V_{DS} \leq 480V$,	dv/dt	50	V/ns
Reverse diode dv/dt , $V_{DS} \leq 480V, I_{SD} < I_D$	dv/dt	50	V/ns
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55...+150	°C

* limited by maximum junction temperature

Table 2. Thermal Characteristic

Parameter	Symbol	Value	Unit
Thermal Resistance, Junction-to-Case (Maximum)	R_{thJC}	0.48	°C /W
Thermal Resistance, Junction-to-Ambient (Maximum)	R_{thJA}	62	°C /W

Table 3. Electrical Characteristics (TA=25°C unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
On/off states						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V I _D =250μA	650			V
Zero Gate Voltage Drain Current(Tc=25℃)	I _{DSS}	V _{DS} =650V, V _{GS} =0V			3	μA
Zero Gate Voltage Drain Current(Tc=125℃)	I _{DSS}	V _{DS} =650V, V _{GS} =0V			300	μA
Gate-Body Leakage Current	I _{GSS}	V _{GS} =±20V, V _{DS} =0V			±100	nA
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250μA	2.6	3.5	4.3	V
Drain-Source On-State Resistance	R _{DS(ON)}	V _{GS} =10V, I _D =14A		120	149	mΩ
Dynamic Characteristics						
Input Capacitance	C _{iss}	V _{DS} =50V, V _{GS} =0V, F=1.0MHz		2070		pF
Output Capacitance	C _{oss}			120		pF
Reverse Transfer Capacitance	C _{rss}			0.5		pF
Total Gate Charge	Q _g	V _{DS} =480V, I _D =28A, V _{GS} =10V		37.5		nC
Gate-Source Charge	Q _{gs}			13		nC
Gate-Drain Charge	Q _{gd}			11.5		nC
Intrinsic gate resistance	R _G	f = 1 MHz open drain		10		Ω
Switching times						
Turn-on Delay Time	t _{d(on)}	V _{DD} =380V, I _D =14A, R _G =2.3Ω, V _{GS} =10V		14		nS
Turn-on Rise Time	t _r			12		nS
Turn-Off Delay Time	t _{d(off)}			65		nS
Turn-Off Fall Time	t _f			11		nS
Source- Drain Diode Characteristics						
Source-drain current(Body Diode)	I _{SD}	T _C =25℃			28	A
Pulsed Source-drain current(Body Diode)	I _{SDM}				112	A
Forward On Voltage	V _{SD}	T _j =25℃, I _{SD} =28A, V _{GS} =0V		0.9	1.2	V
Reverse Recovery Time	t _{rr}	T _j =25℃, I _F =14A, di/dt=100A/μs		190		nS
Reverse Recovery Charge	Q _{rr}			2		uC
Peak Reverse Recovery Current	I _{rm}			21		A

Notes 1.Repetitive Rating: Pulse width limited by maximum junction temperature

2. $T_J=25^\circ C, V_{DD}=50V, V_G=10V, R_G=25\Omega$

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS (curves)

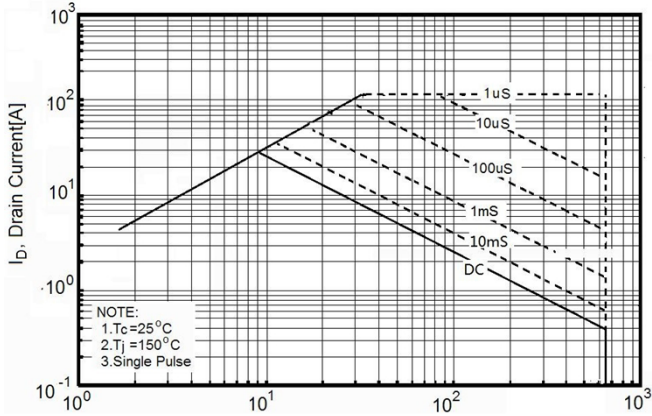
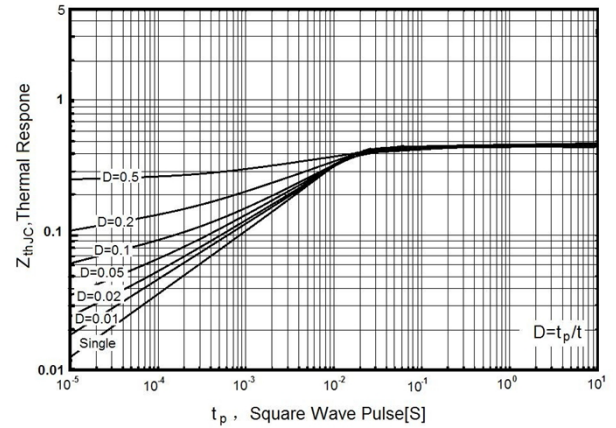
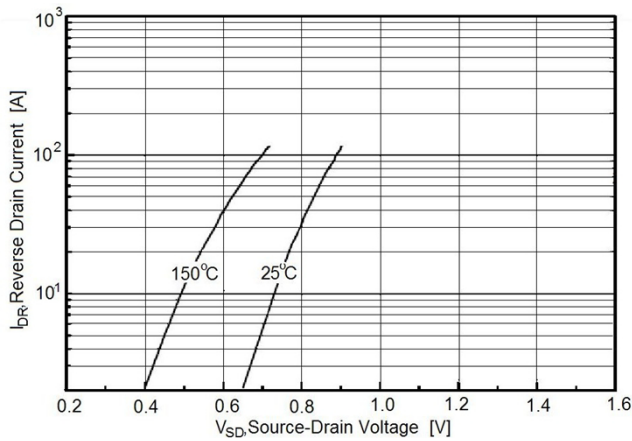
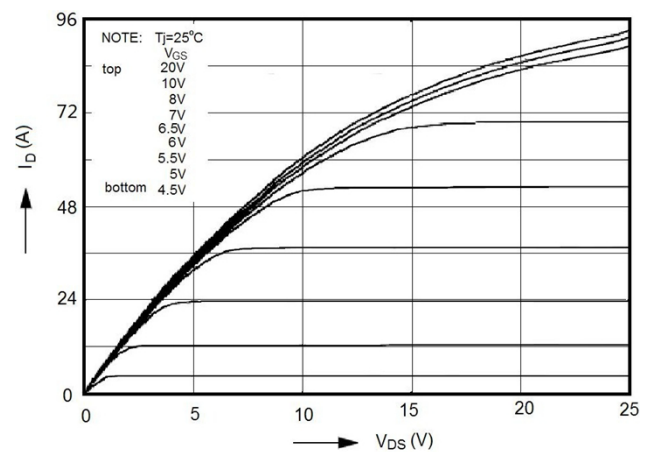
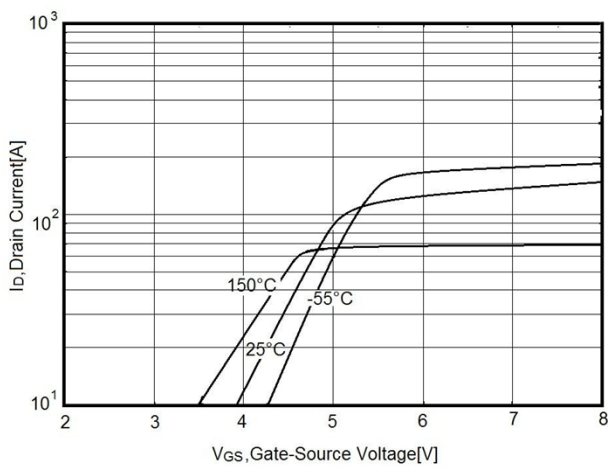
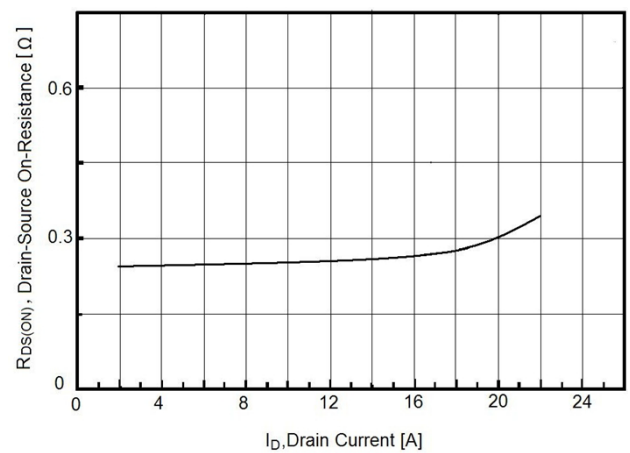
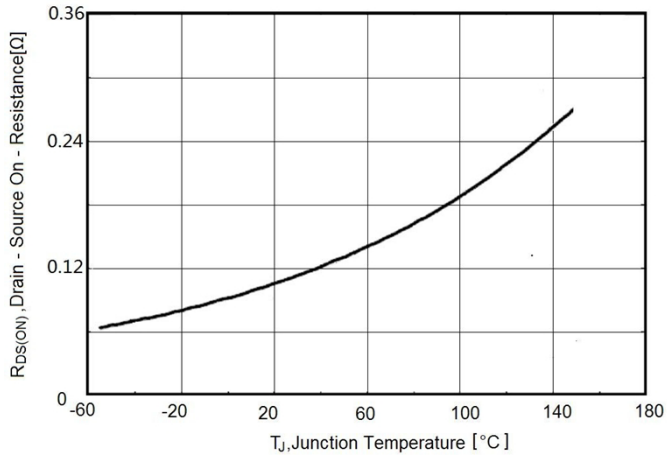
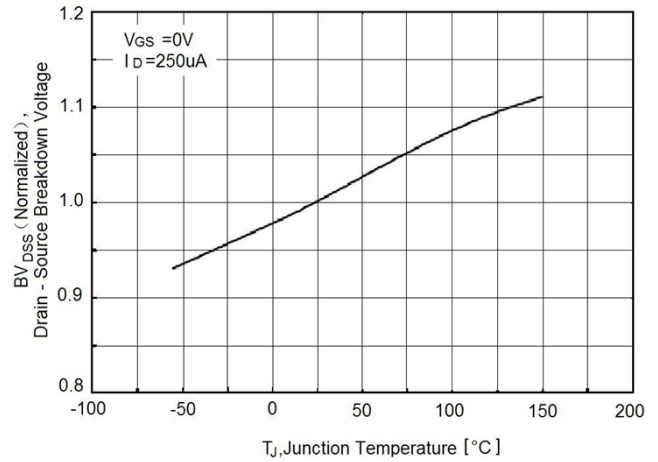
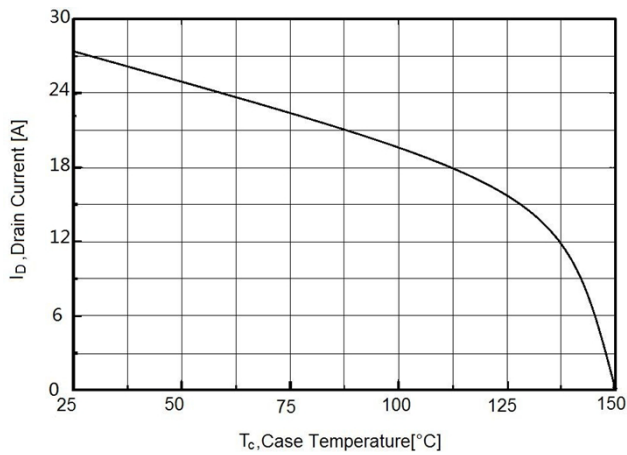
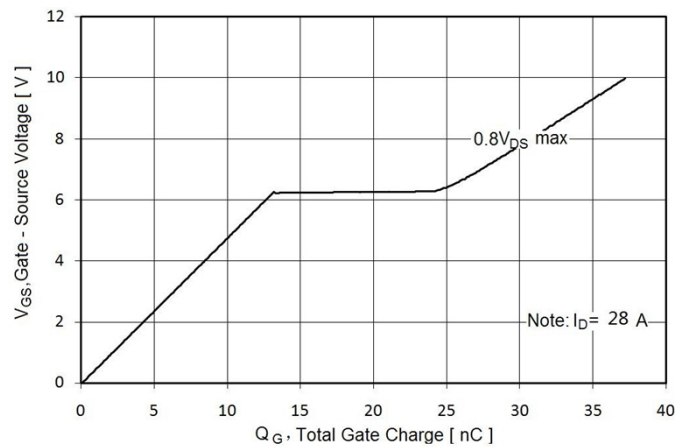
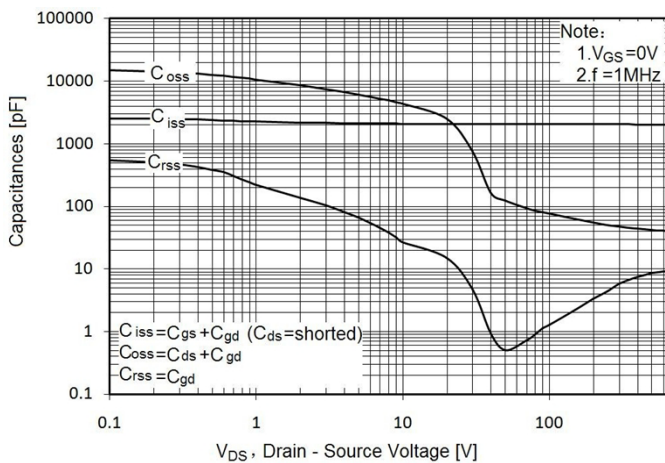
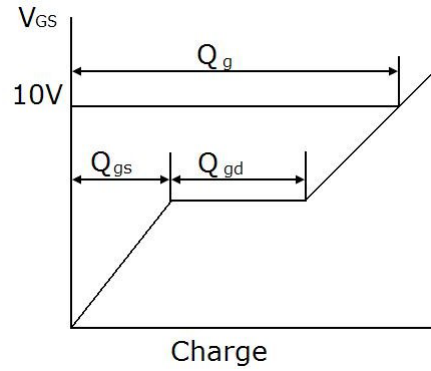
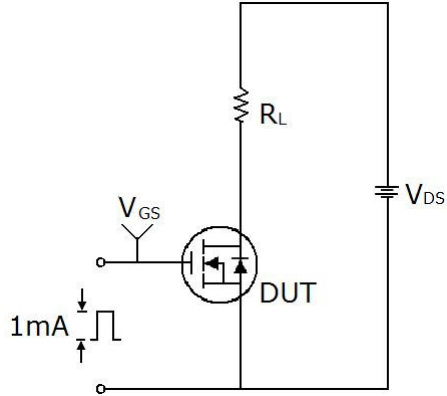
Figure1. Safe operating area

Figure2. Transient Thermal Impedance

Figure3. Source-Drain Diode Forward Voltage

Figure4. Output characteristics

Figure5. Transfer characteristics

Figure6. Static drain-source on resistance


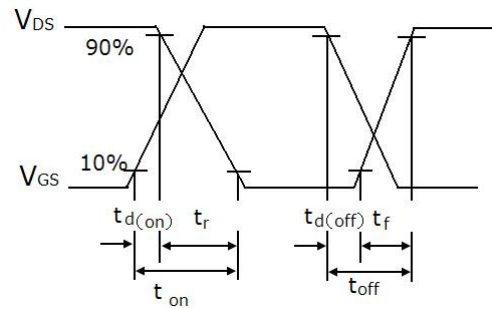
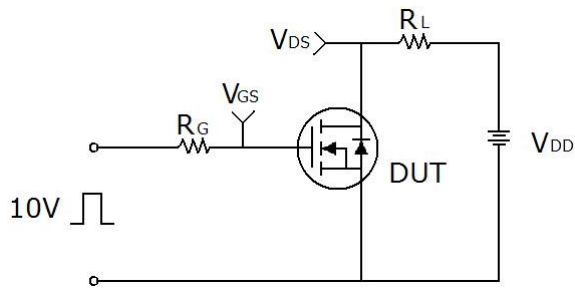
Figure7. $R_{DS(on)}$ vs Junction Temperature

Figure8. BV_{DSS} vs Junction Temperature

Figure9. Maximum I_D vs Junction Temperature

Figure10. Gate charge waveforms

Figure11. Capacitance


Test circuit

1) Gate charge test circuit & Waveform



2) Switch Time Test Circuit:



3) Unclamped Inductive Switching Test Circuit & Waveforms

